

## Features & Benefits

Universal ac input voltage(120-277VAC)

Linear form factor, metal sheet case(white), side feed

Isolated 0-10v dimming interface, dim down to true 2.3ma

Low standby power: <0.7W@120VAC

Suitable for indoor use

Flicker free, excellent camera compatibility, spec-grade smoothness

USB programmable feature:

Output current, dim to off, min dimming level

OTP point of driver, led module thermal protection, luminous decay compensation,

End-of-life indicator, fade in time, over load protection point

Dimming curve: Log/linear/square dim curves

Class2, Class P

Comply with IEEE1789, UL8750



## Model List

| Model Name                  | Rated Input Voltage | Max Output Power(Total) | Output Current(Total) | Rated Output Voltage | Efficiency | Dimension                        |
|-----------------------------|---------------------|-------------------------|-----------------------|----------------------|------------|----------------------------------|
| ESL-A1-085S2300U-V-AUX-PC-2 | 120-277VAC          | 85W max.                | 230-2300mA            | 10-55VDC             | 90%        | 380*30*25.4 mm<br>14.9×1.2×1 in. |

## Optional Function

Aux power: 12-24V programmable,1W

## Approvals



## Model name code

|        |   |     |   |      |   |   |   |   |     |   |    |   |   |
|--------|---|-----|---|------|---|---|---|---|-----|---|----|---|---|
| ESL-A1 | - | 085 | S | 2300 | U | - | V | - | AUX | - | PC | - | 2 |
| ①      |   | ②   | ③ | ④    | ⑤ |   | ⑥ |   | ⑦   |   | ⑧  |   | ⑨ |

|   |                        |                                                              |
|---|------------------------|--------------------------------------------------------------|
| ① | Series                 | Essence Series                                               |
| ② | Output power           | Maximum output power: 85W                                    |
| ③ | Output Channel         | Single channel                                               |
| ④ | Output current(max)    | Maximum output current: 2300mA                               |
| ⑤ | Input voltage          | U=120-277VAC<br>M=120-277VAC                                 |
| ⑥ | Dimming Control        | 0-10V                                                        |
| ⑦ | AUX                    | AUX: with Auxiliary source<br>BLANK:without Auxiliary source |
| ⑧ | Programmable           | USB-PC                                                       |
| ⑨ | Surge protection level | 2-10<br>2=2kV 10=10kV                                        |


## Specification:

| Parameters | Symbols | Test Conditions / Comment | Min | Typ | Max | Units |
|------------|---------|---------------------------|-----|-----|-----|-------|
|------------|---------|---------------------------|-----|-----|-----|-------|

### INPUT



|                     |                 |                                  |     |       |      |          |
|---------------------|-----------------|----------------------------------|-----|-------|------|----------|
| Input Voltage       | $V_{IN}$        |                                  | 108 |       | 305  | $V_{AC}$ |
| Rated Input Voltage | $V_{IN\ RATED}$ |                                  | 120 |       | 277  | $V_{AC}$ |
| Input Frequency     | $f_{line}$      |                                  | 47  | 50/60 | 63   | Hz       |
| Input Current       | $I_{IN}$        | Full Load, $V_{IN} = 120V_{AC}$  |     |       | 0.94 | A        |
| Inrush Current      | $I_{INRUSH}$    | Cold Start, $V_{IN} = 277V_{AC}$ |     |       | 60   | A        |
| Leakage Current     | $I_{Leakage}$   | $V_{IN} = 277V_{AC}$ , 60Hz      |     |       | 0.75 | mA       |

|                                            |                    |     |     |     |     |     |     |     |     |     |     |     |     |
|--------------------------------------------|--------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Number of Drivers per MCB(Circuit Breaker) | MCB type           | B10 | C10 | D10 | B13 | C13 | D13 | B16 | C16 | D16 | B20 | C20 | D20 |
|                                            | 120V <sub>AC</sub> | 13  | 15  | 17  | 17  | 20  | 22  | 21  | 24  | 28  | 26  | 30  | 35  |
|                                            | 277V <sub>AC</sub> | 9   | 15  | 31  | 39  | 20  | 40  | 15  | 25  | 50  | 18  | 31  | 62  |
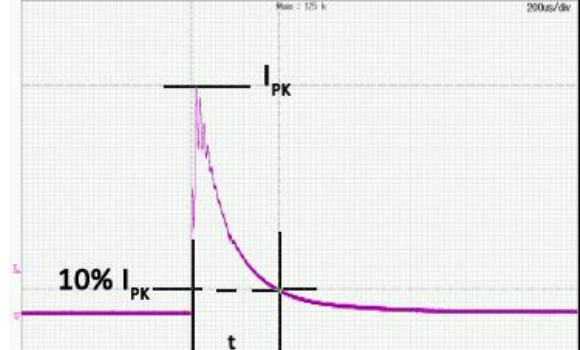
|                                                                                    |               |                |              |
|------------------------------------------------------------------------------------|---------------|----------------|--------------|
|  | Input Voltage | Inrush Current | t(us)10%-10% |
|                                                                                    | 120VAC        | 22.2A          | 186          |
|                                                                                    | 277VAC        | 51.2A          | 180          |
|                                                                                    | 347VAC        | NA             | NA           |




### General Characteristics

|                           |                 |                                                                      |     |    |     |    |
|---------------------------|-----------------|----------------------------------------------------------------------|-----|----|-----|----|
| Power Factor              | PF              | 20-100% load, $V_{IN} = 120V_{AC}$                                   | 0.9 |    |     | PF |
|                           |                 | 40-100% load, $V_{IN} = 277V_{AC}$                                   | 0.9 |    |     |    |
| Total Harmonic Distortion | THD             | 20-100% load, $V_{IN} = 120V_{AC}$                                   |     |    | 20  | %  |
|                           |                 | 40-100% load, $V_{IN} = 277V_{AC}$                                   |     |    | 20  | %  |
| Efficiency                | $\eta$          | $I_{OUT}=1600mA$ , $V_{OUT}=55V$ , $V_{IN}=120V_{AC}$ , steady state | 87  | 88 |     | %  |
|                           |                 | $I_{OUT}=1600mA$ , $V_{OUT}=55V$ , $V_{IN}=277V_{AC}$ , steady state | 89  | 90 |     | %  |
| Turn On Delay Time        | $T_{on\_delay}$ | Cold Start, 700-2300mA                                               |     |    | 0.5 | S  |
|                           |                 | Cold Start, 230-699mA                                                |     |    | 1   | S  |

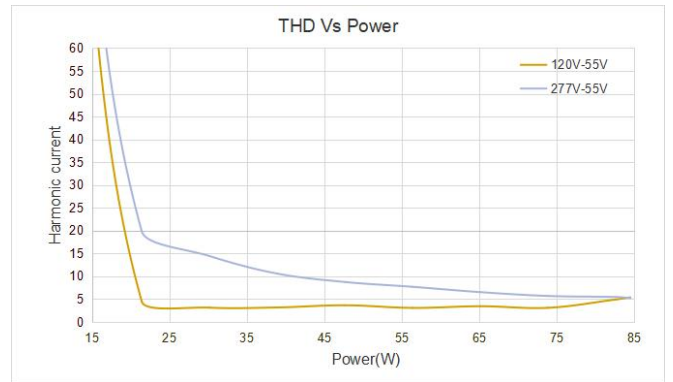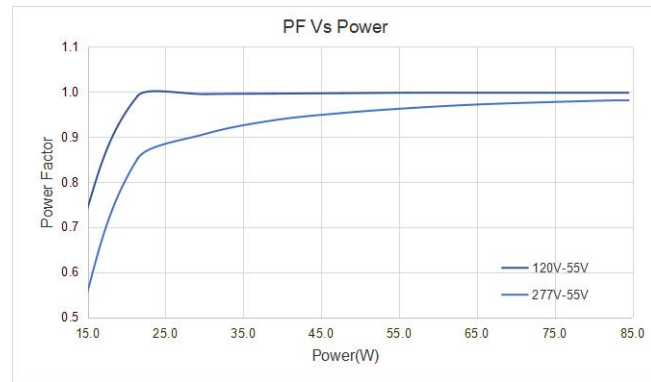

## OUTPUT

|                          |                  |                                                      |     |      |    |
|--------------------------|------------------|------------------------------------------------------|-----|------|----|
| Programmable Current     | Output           | $I_{OUT}$                                            | 230 | 2300 | mA |
| Output current tolerance | $t$              | $I_{OUT}=700-2300mA$                                 |     | 5    | %  |
|                          |                  | $I_{OUT}=230-699mA$                                  |     | 7    | %  |
| Output Current Range     | $I_{OUT}$        | Amplitude Control.                                   | 2.3 | 2300 | mA |
| Output Voltage           | $V_{OUT}$        |                                                      | 10  | 55   | V  |
| Output Power             | $P_{OUT}$        | See "Operating window"                               |     | 85   | W  |
| Line Regulation          | $V_{OUT-LINE}$   |                                                      |     | 1    | %  |
| Load Regulation          | $I_{OUT-LOAD}$   | $V_{OUT}$ from MIN. to MAX.                          |     | 5    | %  |
| Ripple Current           | $I_{OUT-RIPPLE}$ | Full Load, $(I_{Omax}-I_{Omin})/(I_{Omax}+I_{Omin})$ |     | 10   | %  |
| Output Current Overshoot | $I_{OVERSHOOT}$  | Turning Power ON                                     |     | 10   | %  |

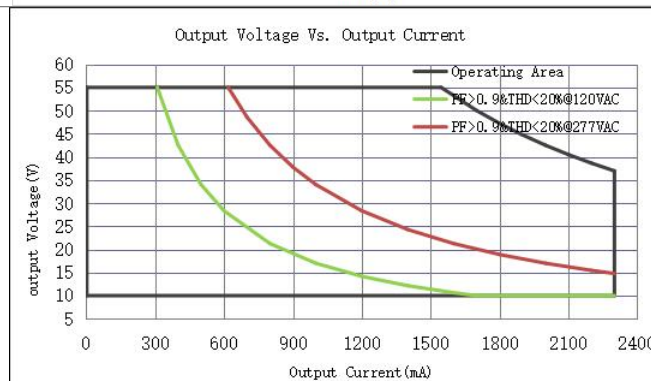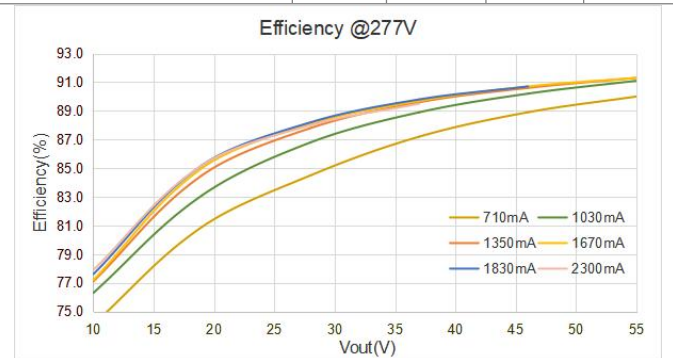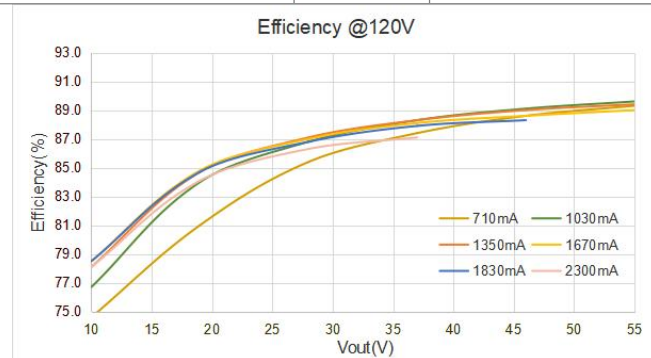

## Programming

The driver can be programmed through USB.

- Output current(1mA step)
- Dim to off, Min Dimming Level
- Output voltage of aux power
- OTP point of driver
- LED thermal protection
- Luminous decay compensation
- End-of-life indicator
- Fade in time
- Over load protection point
- Log/linear/square dim curves


|          |                                                                                                                                                                                                                                                                                           |                             |     |     |     |
|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|-----|-----|-----|
| USB port | The USB port can recognize the type of input signal, analog or digital. So the driver can be easily connected to a digital control system, or can be connected to an external NTC / rheostat / current selection switch to set the driver(eg: output current , dimming level, and so on). |                             |     |     |     |
|          | Programming software                                                                                                                                                                                                                                                                      | “LUMIGEAR Programming Tool” |     |     |     |
|          | Programming tool                                                                                                                                                                                                                                                                          | “Lumigear tool box”         |     |     |     |
|          | Operating voltage                                                                                                                                                                                                                                                                         |                             | 3.3 | 3.6 | V   |
|          | Pull up resistor                                                                                                                                                                                                                                                                          | TX is pulled up to +3.3V    | 62K |     | Ohm |
|          |                                                                                                                                                                                                                                                                                           | RX is pulled up to +3.3V    | 15K |     | Ohm |

## 0~10V or Resistor Dimming


The 0~10V or resistor dimming can be used to dim the output Current via a standard commercial wall dimmer (0~10V<sub>DC</sub>) or an external control voltage source (0~10V<sub>DC</sub>) or external resistor.

|                                       |                                     |                                  |     |     |                 |
|---------------------------------------|-------------------------------------|----------------------------------|-----|-----|-----------------|
| Dimming Curve                         | Linear. please see “Dimming curve”. |                                  |     |     |                 |
| Dimming Mode                          |                                     |                                  |     |     |                 |
| Absolute Maximum Voltage on 0~10V Pin | V <sub>DIM</sub>                    |                                  | 0   | 50  | V               |
| Source Current on 0~10V Dimming Pin   | I <sub>DIM</sub>                    |                                  | 200 | 500 | uA              |
| Light On                              | V <sub>DIM-on</sub>                 | Programmable                     |     | 0.9 | V               |
| Light Off                             | V <sub>DIM-off</sub>                | Programmable                     |     | 0.7 | V               |
| Clamp Voltage at Min dimming level    | V <sub>DIM-Clamp</sub>              | Programmable                     |     | 1   | V               |
| Dimming Voltage for Full Bright       | V <sub>DIM-MAX</sub>                | Programmable                     |     | 8   | V               |
| Leakage Voltage                       | V <sub>Leak_rms</sub>               | Voltage between DIM- and Ground  |     | 20  | V <sub>AC</sub> |
| Standby power                         | P <sub>STANDBY</sub>                | Light Off, V <sub>IN</sub> =120V |     | 0.6 | W               |


Figure 1: Intensity Dimming Profile Characteristics

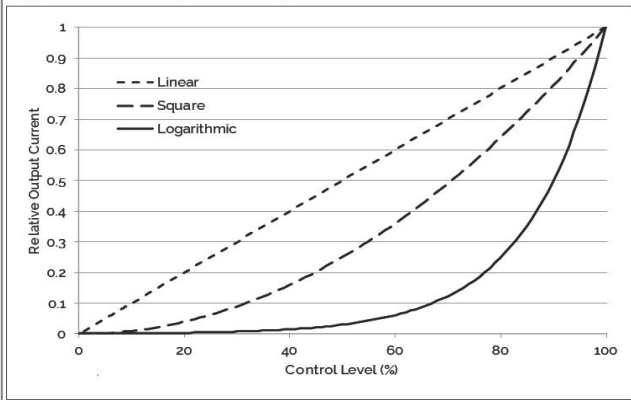

Dimming Voltage Vs. Output Current

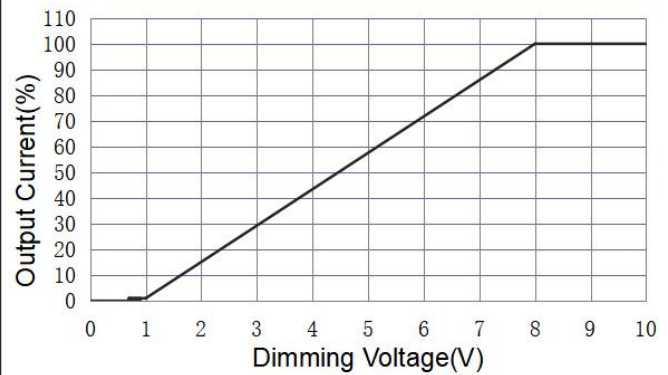

Dimming Voltage Vs. Output Current

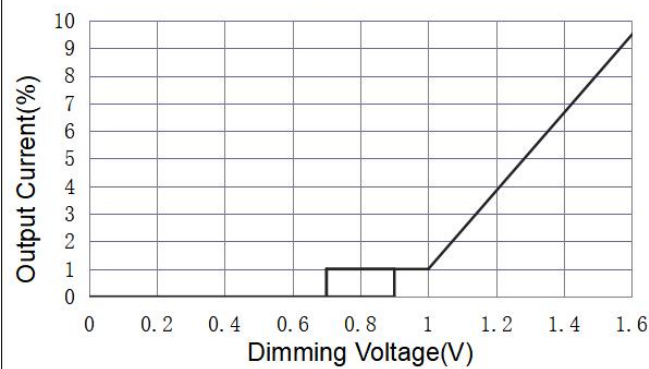

## Auxiliary source (Optional)

|                      |                    |                 |    |    |     |     |
|----------------------|--------------------|-----------------|----|----|-----|-----|
| Max.power            | $P_{AUX}$          |                 |    |    | 1   | W   |
| Voltage range        | $V_{AUX}$          | Programmable    | 12 |    | 24  | Vdc |
|                      | $V_{AUX\_DEFAULT}$ | Default voltage |    | 12 |     | Vdc |
| Voltage tolerance    | $t_{AUX}$          |                 |    |    | 8   | %   |
| Over load Protection | $P_{OLP\_AUX}$     | Foldback mode   |    |    | 1.5 | W   |


## LED Thermal Protection (NTC) Characteristic

The LED thermal protection feature of the driver helps reduce the temperature of the LED module by reducing dual output current together in case of abnormal temperature conditions.

In the end application, care must be taken to place the NTC thermistor close to the hottest spot on the LED module.

If LED thermal protection is not required the NTC port on the LED power supply connector can be left open.

Graphs for reference. The derating limits can be programmed using the Light Touch.

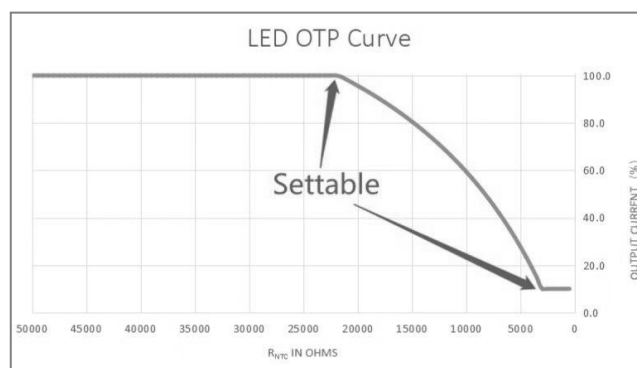

## Protection


|                          |                                                                        |                                                                                 |     |    |     |    |
|--------------------------|------------------------------------------------------------------------|---------------------------------------------------------------------------------|-----|----|-----|----|
| Over Voltage Protection  | $V_{OVP}$                                                              | Recover automatically after fault conditions is removed.                        |     |    | 60  | V  |
| Over load protection     | $P_{OLP}$                                                              | Programmable.The output current will decrease when output power reach $P_{OLP}$ | 34  |    | 85  | W  |
| OLP tolerance            | $t_{OLP}$                                                              |                                                                                 | 100 |    | 110 | %  |
| Over Temp. Protection    | $T_{OTP}$                                                              | Programmable.<br>Current foldback at hotspot greater than $T_{OTP}$             |     | 90 |     | °C |
| Short Circuit Protection | The unit will recover automatically after fault conditions is removed. |                                                                                 |     |    |     |    |

## Environment

|                               |                          |                               |     |   |     |     |
|-------------------------------|--------------------------|-------------------------------|-----|---|-----|-----|
| Storage Temperature           | $T_{Storage}$            | Humidity: 5% RH to 95% RH     | -40 | - | +85 | °C  |
| Ambient Operating Temperature | $T_a$                    |                               | -30 | - | +55 | °C  |
| Max. Case Temperature         | $T_c$                    | Hot spot on case              |     |   | 90  | °C  |
| Operating Relative Humidity   | $H_a$                    | Non-Condensing                | 10  |   | 90  | %   |
| Acoustic Noise                |                          | Measured from 1 m w/o dimmer. |     |   | 24  | dBA |
| Cooling                       | Convection Cooling       |                               |     |   |     |     |
| IP Rating                     | Dry and damp UL approved |                               |     |   |     |     |

## Others

|            |                                           |                                                                 |     |     |  |      |
|------------|-------------------------------------------|-----------------------------------------------------------------|-----|-----|--|------|
| Life Time  | $T_{Life}$                                | Full Load, 80°C case temperature,<br>$V_{IN} = 120/277V_{AC}$   | 50  |     |  | kHrs |
| MTBF       | $T_{MTBF}$                                | Full Load, 25°C ambient temperature<br>$V_{IN} = 120/277V_{AC}$ | 200 |     |  | kHrs |
| Net Weight | $W_{NET}$                                 |                                                                 |     | 375 |  | g    |
| Warranty   | 5 Years Warranty at $T_c \leq 80^\circ C$ |                                                                 |     |     |  |      |
| Flicker    | IEEE 1789,Title 24                        |                                                                 |     |     |  |      |

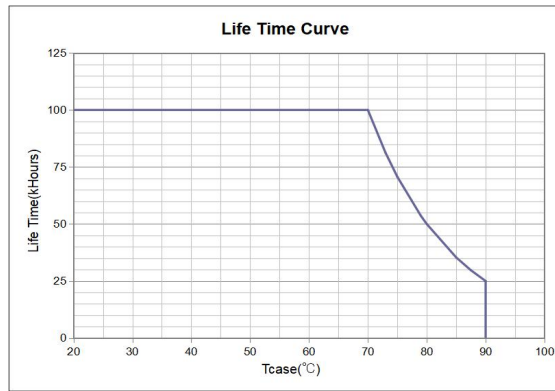

## Safety Compliance


|        |                                  |
|--------|----------------------------------|
| CUL/UL | UL8750, CAN/CSA-C22.2 No. 250.13 |
|--------|----------------------------------|

## Electromagnetic Compliance

| EMC Requirements                 | Standard                     | Conditions                                                                                                                                        |
|----------------------------------|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| EMI Emissions                    | FCC Title 47 Part 15B        | Class B at 120V <sub>AC</sub> , Class A at 277V <sub>AC</sub>                                                                                     |
| Voltage Fluctuations and Flicker | IEC61000-3-3                 |                                                                                                                                                   |
| Immunity Compliance              | IEC 61000-4-2                | ±8kV air Discharge, ±6kV Contact Discharge                                                                                                        |
|                                  | ANSI C82.77-5-2015(Optional) | Category B 6KV                                                                                                                                    |
|                                  | ANSI C62.41.1                | 2.5kV Ring Wave, test at 30Ω 7 Strikes/1 minute interval, Common and Differential mode, 56 total strikes                                          |
|                                  | IEC 61000-4-11               | >95% dip, .5 period; 30% dip, 25 periods; 95% reduction, 250 periods                                                                              |
|                                  | IEC 61000-4-4                | ± 2kV Direct couple to Line input, 5kHz repetition rate, 15mS duration, 300mS period. 7 coupling paths, 1 minute per path (14 total combinations) |

Note: Unless otherwise specified, all the above parameters are measured at ambient temperature of 25°C and rated voltage.

## Typical Application

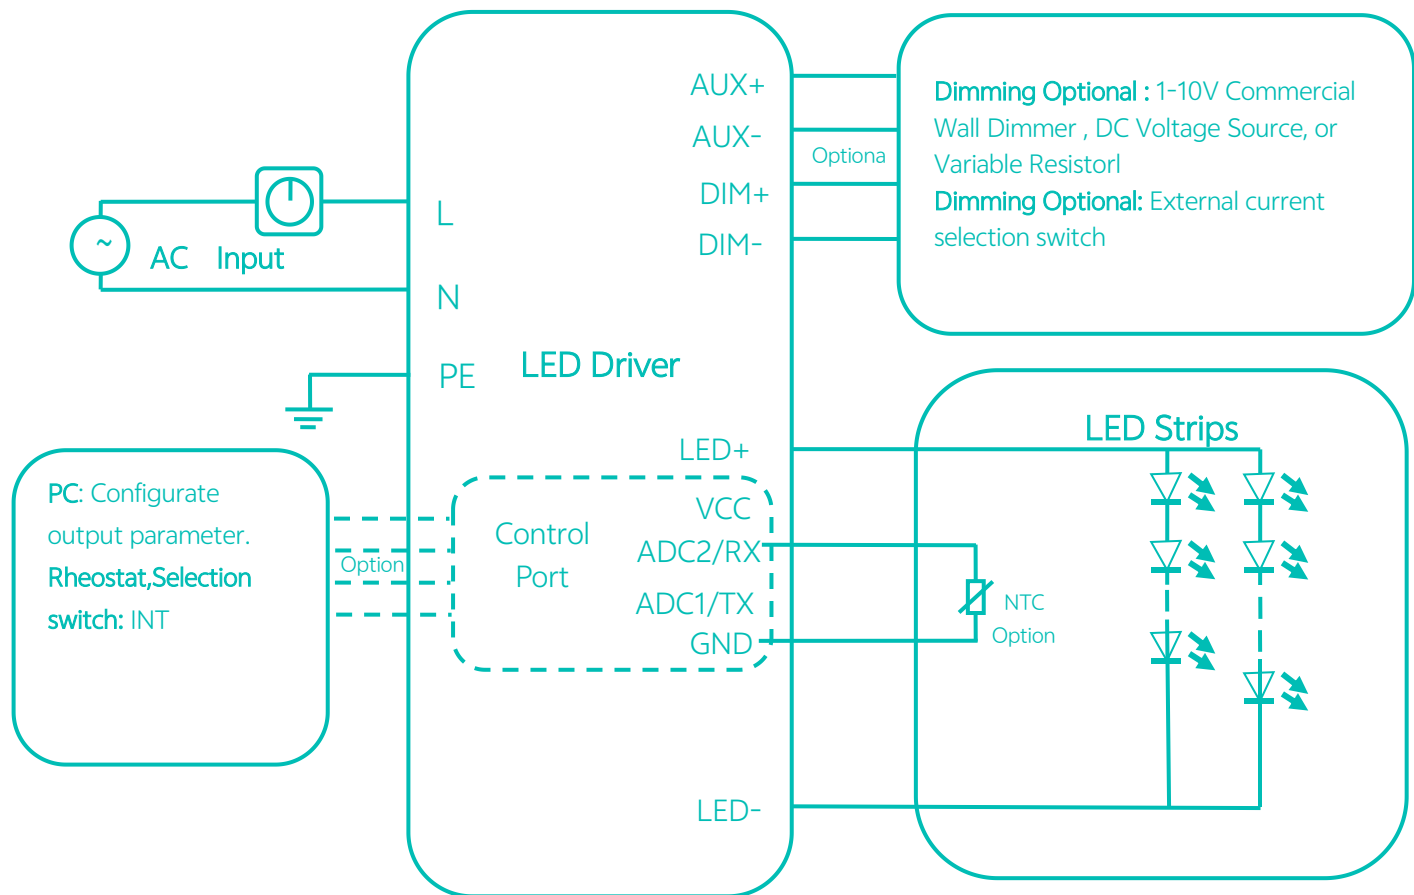

## Packaging

| Version        | Driver quantity (pcs) | Layer | Weight (kg) | Outer dimensions of Carton<br>L*W*H(mm) |
|----------------|-----------------------|-------|-------------|-----------------------------------------|
| Standard Style | 35                    | 5     | 14.5        | 400 X 275 X 180                         |
| Long Style     | 30                    | 5     | 12          | 445 X 230 X 215                         |

## Mechanical Drawing:

