

Features & Benefits

- Universal AC Input voltage(120-277VAC)
- Brick form factor, metal sheet case
- Isolated 0-10v dimming ,dim down to true 1%
- Suitable for indoor use
- Flicker free, excellent camera compatibility
- UL Class2, Class P
- Comply IEEE1789, UL8750

Programmable feature:

- ◆ Output current, dim to off, min dimming level, output voltage of aux power
- ◆ OTP point of driver, LED thermal protection, luminous decay compensation
- ◆ End-of-life indicator, fade in time, over load protection point

Model List

| Model Name | Rated Input Voltage | Max Output Power(Total) | Output Current(Total) | Rated Output Voltage | Efficiency | Dimension |
|-------------------------------|---------------------|-------------------------|-----------------------|----------------------|------------|-------------------------------------|
| ESC-A1-055S2000U-V-AUX-PC-A-M | 120-277VAC | 55W max. | 200-2000mA | 10-55VDC | 90% | 127*60.3*27.5 mm 5.0*2.3*1.1 in. |

Optional Function

- Aux power: 12-24V programmable,1W
- Built-in 3 current adjustment by INT switch
- Built-in 3CCT switch
- Mounting feet or stud type
- Digital and analog interface ready

Approvals



Model name code

| | | | | | | | | | | | | | | | | |
|--------|---|------|--|------|--|---|---|---|---|-----|---|----|---|---|---|---|
| ESC-A1 | = | 055S | | 2000 | | U | = | V | = | AUX | = | PC | = | A | = | M |
| ① | | ② | | ③ | | ④ | | ⑤ | | ⑥ | | ⑦ | | ⑧ | | ⑨ |

| | | |
|---|---------------------|--|
| ① | Series | ESC Series |
| ② | Output power | Maximum output power: 55W |
| ③ | Output current(max) | Maximum output current: 2000mA |
| ④ | Input voltage | 120-277VAC |
| ⑤ | Dimming Control | 0-10V |
| ⑥ | AUX | AUX: with Auxiliary source BLANK:without Auxiliary source |
| ⑦ | Programmable | USB-PC |

| | | | |
|---|-----------------|--|---|
| ⑧ | Switch function | A: without INT and CCT Switch C: with CCT Switch only | B:with INT Switch only D :with INT+CCT Switch. |
| ⑨ | Installation | M: Mounting feet BLANK:Stud type | |


Specification:

| Parameters | Symbols | Test Conditions / Comment | Min | Typ | Max | Units |
|------------|---------|---------------------------|-----|-----|-----|-------|
|------------|---------|---------------------------|-----|-----|-----|-------|

INPUT

| | | | | | | |
|---------------------|---------------|----------------------------------|-----|-------|------|----------|
| Input Voltage | V_{IN} | | 108 | | 305 | V_{AC} |
| Rated Input Voltage | $V_{INRATED}$ | | 120 | | 277 | V_{AC} |
| Input Frequency | f_{line} | | 47 | 50/60 | 63 | Hz |
| Input Current | I_{IN} | Full Load, $V_{IN} = 120V_{AC}$ | | | 0.6 | A |
| Inrush Current | I_{INRUSH} | Cold Start, $V_{IN} = 277V_{AC}$ | | | 60 | A |
| Leakage Current | $I_{Leakage}$ | $V_{IN} = 277V_{AC}$ 60Hz | | | 0.75 | mA |



| Number of Drivers per MCB(Circuit Breaker) | MCB type | B10 | C10 | D10 | B13 | C13 | D13 | B16 | C16 | D16 | B20 | C20 | D20 |
|--|--------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| | 120V _{AC} | 7 | 12 | 15 | 9 | 16 | 19 | 11 | 19 | 24 | 14 | 24 | 30 |
| | 277V _{AC} | 4 | 6 | 13 | 5 | 9 | 18 | 6 | 11 | 22 | 8 | 13 | 27 |

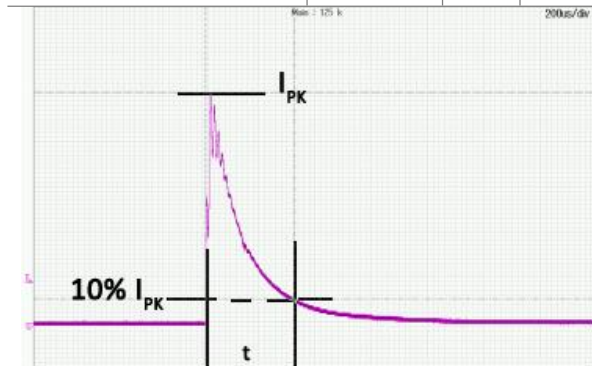

| Input Voltage | Inrush Current | t(us)10%-10% |
|---------------|----------------|--------------|
| 120VAC | 28.4A | 126 |
| 277VAC | 57.6A | 128 |
| 347VAC | NA | NA |


General Characteristics

| | | | | | |
|---------------------------|-----------------|---|------|-----|----|
| Power Factor | PF | 20-100% load, $V_{IN} = 120V_{AC}$ | 0.95 | | PF |
| | | 40-100% load, $V_{IN} = 277V_{AC}$ | 0.9 | | |
| Total Harmonic Distortion | THD | 20-100% load, $V_{IN} = 120V_{AC}$ | | 20 | % |
| | | 40-100% load, $V_{IN} = 277V_{AC}$ | | 20 | % |
| Turn On Delay Time | T_{on_delay} | Cold Start, 200-2000mA | | 0.5 | S |
| Efficiency | η | Full load, $V_{IN} = 120V_{AC}$, $I_{OUT} = 1000mA$, Steady state | 87 | 89 | % |
| | | Full load, $V_{IN} = 277V_{AC}$, $I_{OUT} = 1000mA$, Steady state | 88 | 90 | % |

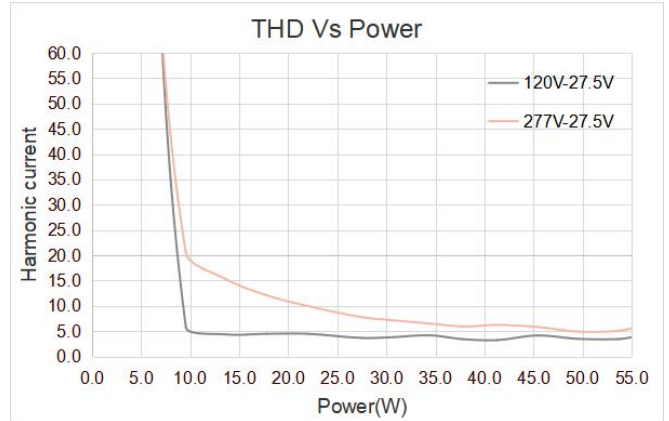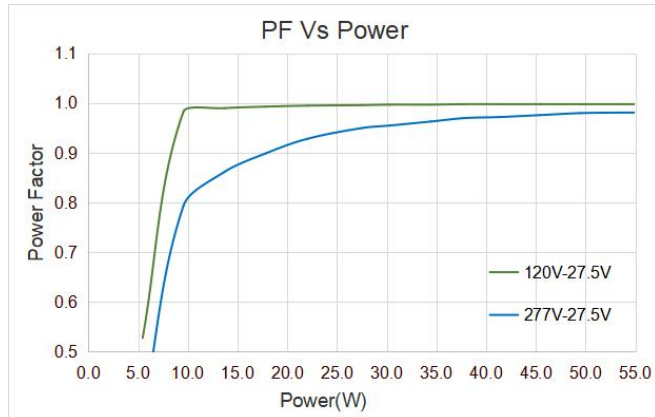

OUTPUT

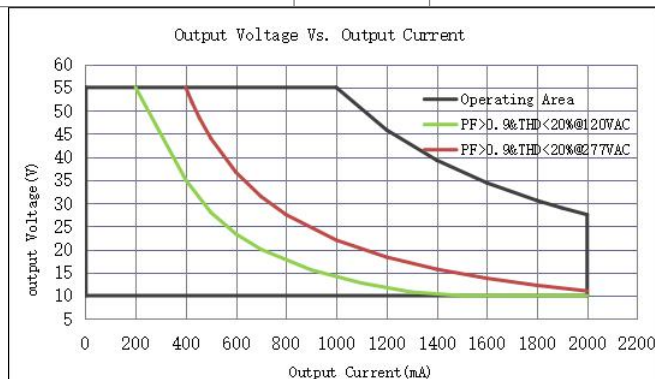

| | | | | | |
|-----------------------------|------------------|--|-----|------|----|
| Programmable Output Current | I_{OUT} | | 200 | 2000 | mA |
| Output Current Tolerance | t | $I_{OUT}=600-2000mA$ | | 5 | % |
| | | $I_{OUT}=200-599mA$ | | 7 | % |
| Output Current Range | I_{OUT} | Amplitude Control. | 2 | 2000 | mA |
| Output Voltage | V_{OUT} | | 10 | 55 | V |
| Output Power | P_{OUT} | See "Operating window" | | 55 | W |
| Line Regulation | $V_{OUT-LINE}$ | | | 1 | % |
| Load Regulation | $I_{OUT-LOAD}$ | V_{OUT} from MIN. to MAX. | | 3.5 | % |
| Ripple Current | $I_{OUT-RIPPLE}$ | Full Load, $(I_{max}-I_{min})/(I_{max}+I_{min})$ | | 10 | % |
| Output Current Overshoot | $I_{OVERSHOOT}$ | Turning Power ON | | 10 | % |



Programming (Optional)

The driver can be programmed through RJ9.



- Output current(1mA step)
- Dim to off, Min Dimming Level
- Output voltage of aux power
- OTP point of driver
- LED thermal protection
- Luminous decay compensation
- End-of-life indicator
- Fade in time
- Over load protection point

| | | | | | | |
|-----------------------|---|--|--|-----|-----|-----|
| RJ9 | The RJ9 port can recognize the type of input signal, analog or digital. So the driver can be easily connected to a digital control system, or can be connected to an external NTC / rheostat / current selection switch to set the driver(eg: output current , dimming level, and so on). | | | | | |
| | Programming software | “LUMIGEAR Programming Tool” | | | | |
| | Programming tool | “Lumigear tool box” | | | | |
| | Operating voltage | | | 5 | 5.5 | V |
| | Pull up resistor | RX is pulled up to +5V | | 15K | | Ohm |
| | | TX is pulled up to +5V | | 62K | | Ohm |
| +5V Aux power | | | | 10 | mA | |
| Programming Interface | PGT-USB-TPAC-A |  | | | | |
| Programming Cables | PGT-USB-RJ9 |  | | | | |

0~10V or Resistor Dimming

The 0~10V or resistor dimming can be used to dim the output current via a standard commercial wall dimmer (0~10V_{DC}) or an external control voltage source (0~10V_{DC}) or external resistor.

| | | | | | | |
|---------------------------------------|-------------------------------------|---------------------------------|---|-----|-----|-----------------|
| Dimming Curve | Linear. please see “Dimming curve”. | | | | | |
| Absolute Maximum Voltage on 0~10V Pin | V _{DIM} | | 0 | | 300 | V _{AC} |
| Source Current on 0~10V Dimming Pin | I _{DIM} | | | 200 | | uA |
| Light On | V _{DIM-on} | Programmable | | 0.9 | | V |
| Light Off | V _{DIM-off} | Programmable | | 0.7 | | V |
| Dimming Voltage for Full Bright | V _{DIM-MAX} | Programmable | | 8 | | V |
| Leakage Voltage | V _{Leak_rms} | Voltage between DIM- and Ground | | | 20 | V _{AC} |
| Standby power | P _{STANDBY} | Light Off, Vin=120VAC | | | 0.7 | W |

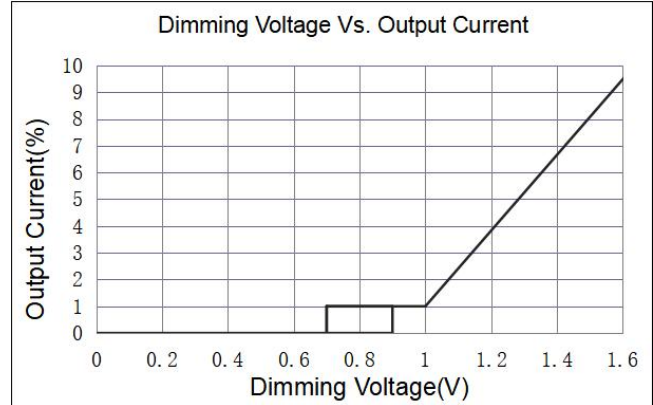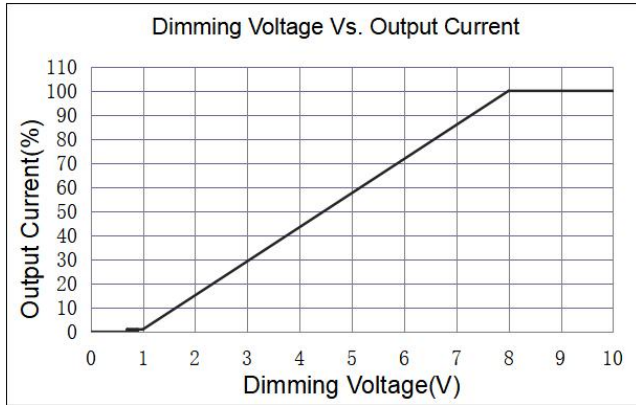

INT(Output current) selection (Optional)

The output current can be set by the INT selection switch

| | |
|-------------------------------|--|
| Built-in INT selection switch | Settable, 3 positions. Please contact Lumigear for details |
|-------------------------------|--|

CCT selection (Optional)

| | |
|-------------------------------|----------------------|
| Build in CCT selection switch | CCT1=CH1 on, CH2 off |
| | CCT2=CH1 on, CH2 on |
| | CCT3=CH1 off, CH2 on |

Auxiliary source (Optional)


| | | | | | |
|----------------------|--------------------|-----------------|----|-----|-----|
| Max.power | P_{AUX} | | | 1 | W |
| Voltage range | V_{AUX} | Programmable | 12 | 24 | Vdc |
| | $V_{AUX_DEFAULT}$ | Default voltage | | 12 | Vdc |
| Voltage tolerance | t_{AUX} | | | 8 | % |
| Over load Protection | P_{OLP_AUX} | Foldback mode | | 1.5 | W |

LED Thermal Protection (NTC) Characteristic

Graphs for reference. The derating limits can be programmed using the Light Touch.

In the end application, care must be taken to place the NTC thermistor close to the hottest spot on the LED module.

If LED thermal protection is not required the NTC port on the LED power supply connector can be left open.

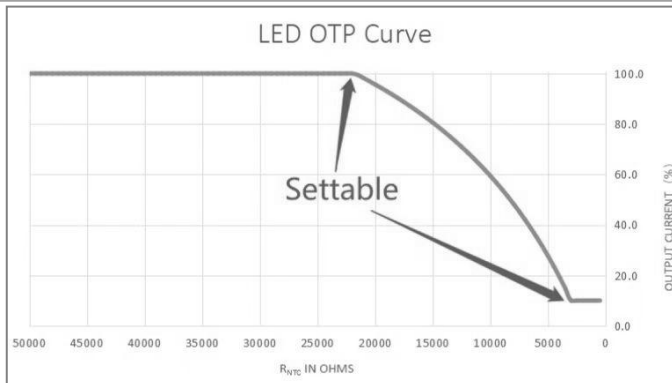

Protection


| | | | | | | |
|--------------------------|--|---|-----|----|-----|----|
| Over Voltage Protection | V_{OVP} | The unit will recover automatically after fault conditions is removed. | | | 60 | V |
| Over load protection | P_{OLP} | Programmable. The output current will decrease when output power reach P_{OLP} | 22 | | 55 | W |
| OLP tolerance | t_{OLP} | | 100 | | 110 | % |
| Over Temp. Protection | T_{OTP} | Programmable. Current foldback at hotspot greater than T_{OTP} | | 90 | | °C |
| Short Circuit Protection | The unit will recover automatically after fault conditions is removed. | | | | | |

Environment

| | | | | | | |
|-------------------------------|--------------------------|-------------------------------|-----|---|-----|-----|
| Storage Temperature | $T_{Storage}$ | Humidity: 5% RH to 95% RH | -40 | - | +85 | °C |
| Ambient Operating Temperature | T_a | | -30 | - | +50 | °C |
| Max. Case Temperature | T_c | Hot spot on case | | | 90 | °C |
| Operating Relative Humidity | H_a | Non-Condensing | 10 | | 90 | % |
| Acoustic Noise | | Measured from 1 m w/o dimmer. | | | 24 | dBA |
| Cooling | Convection Cooling | | | | | |
| IP Rating | Dry and damp UL approved | | | | | |

Others

| | | | | | | |
|------------|---|-------------------------------------|-----|-----|--|------|
| Life Time | T_{Life} | Full Load, 85°C case temperature, | 50 | | | kHrs |
| MTBF | T_{MTBF} | Full Load, 25°C ambient temperature | 200 | | | kHrs |
| Net Weight | W_{NET} | | | 255 | | g |
| Warranty | 5 Years Warranty at $T_c \leq 85^\circ\text{C}$ | | | | | |
| Flicker | IEEE 1789, title 24 | | | | | |

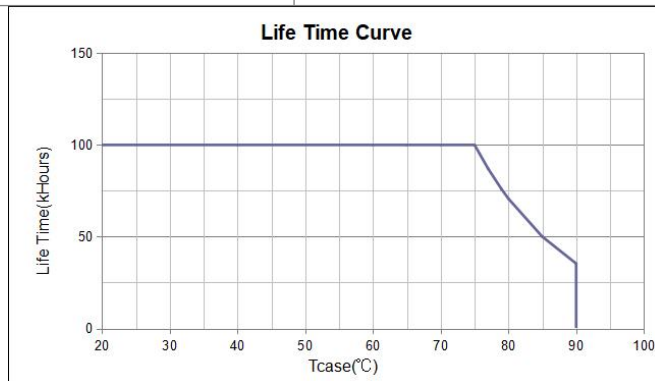

Safety Compliance


| | |
|--------|----------------------------------|
| CUL/UL | UL8750, CAN/CSA-C22.2 No. 250.13 |
| LVD | EN61347 |

Electromagnetic Compliance

| EMC Requirements | Standard | Conditions |
|----------------------------------|-------------------------|---|
| EMI Emissions | FCC Title 47 Part 15 | Class B at 120V _{AC} , Class A at 277V _{AC} |
| Voltage Fluctuations and Flicker | IEC61000-3-3 | |
| Immunity Compliance | IEC 61000-4-2 | ±8kV air Discharge, ±6kV Contact Discharge |
| | ANSI/IEEE C62.41-2002 | ± 2kV Common and Differential Mode, test at 2 Ω, 5 strikes/1minute interval (40 total strikes) |
| | ANSI/IEEE C62.41.1-2002 | 2.5kV Ring Wave, test at 30Ω 7 Strikes/1 minute interval, Common and Differential mode, 56 total strikes |
| | IEC 61000-4-11 | >95% dip, .5 period; 30% dip, 25 periods; 95% reduction, 250 periods |
| | IEC 61000-4-4 | ± 2kV Direct couple to Line input, 5kHz repetition rate, 15mS duration, 300mS period. 7 coupling paths, 1 minute per path (14 total combinations) |

Note: Unless otherwise specified, all the above parameters are measured at ambient temperature of 25°C and rated voltage.

Typical Application

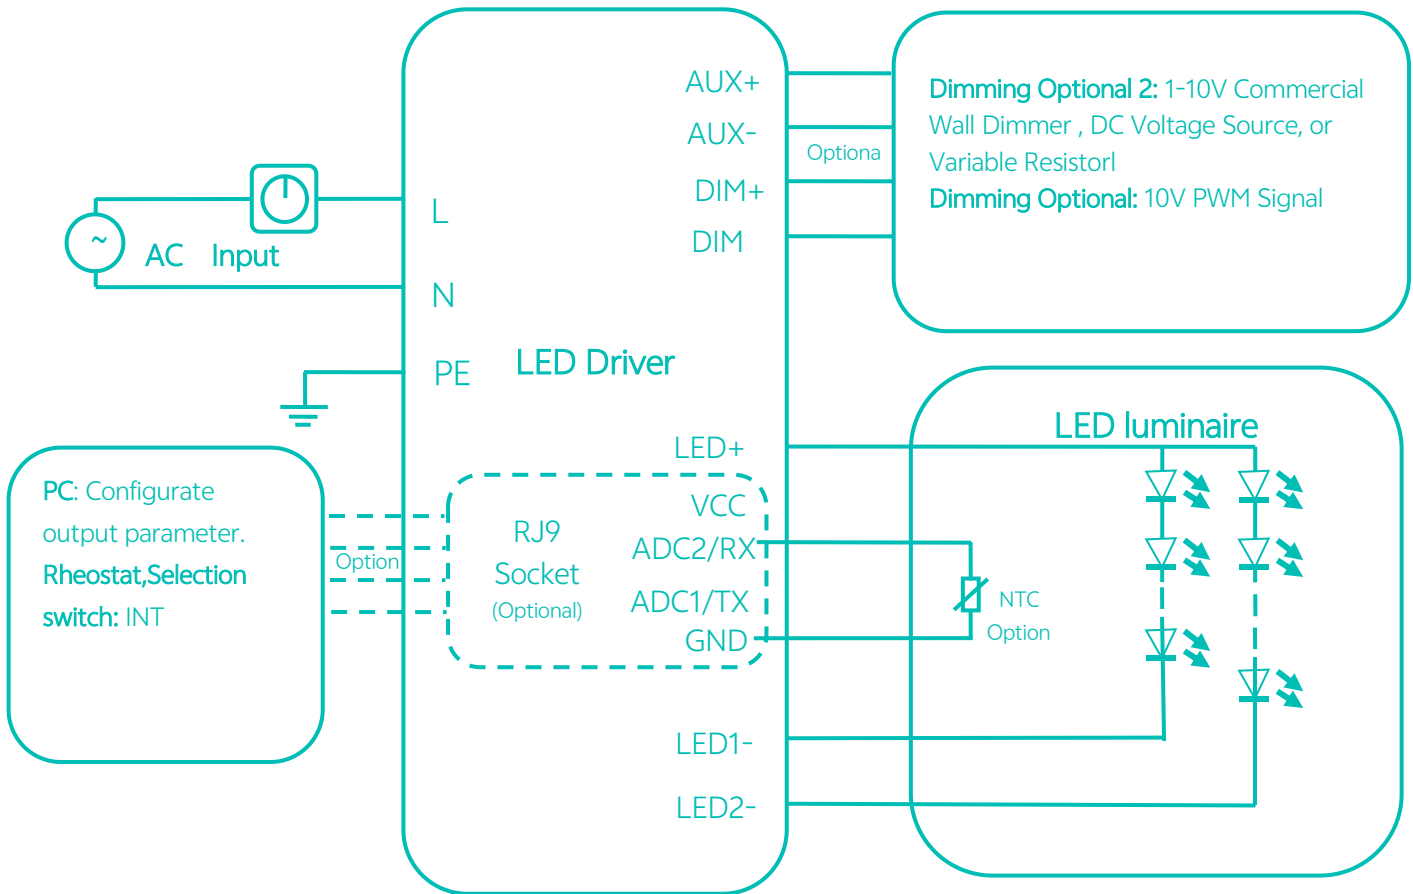


Packaging

| Driver quantity (pcs) | Layer | Weight (kg) | Outer dimensions of Carton L*W*H(mm) |
|-----------------------|-------|-------------|---|
| 48 | 6 | 13 | L365*W340*H270 |

Mechanical Drawing:

S TYPE:

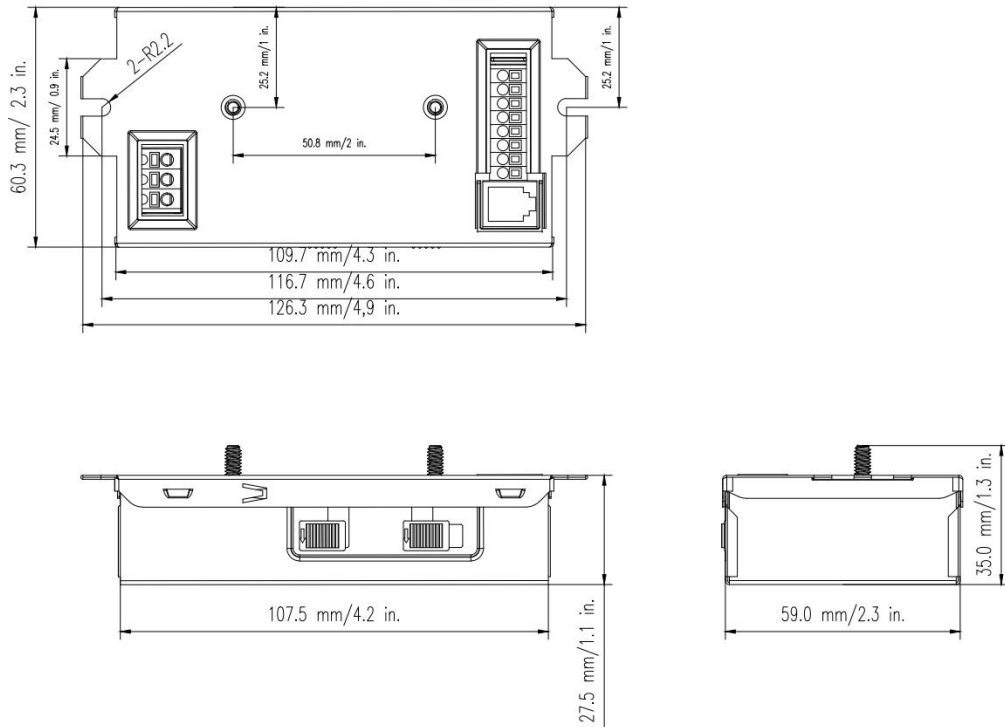

M TYPE:

