

Features & Benefits

Universal AC input voltage(110-277VAC)

All-round protection: SCP, OVP, OTP, OPP(CC/CV mode, especially suitable for LED strip)

Flicker free, excellent camera compatibility, spec-grade smoothness

Painted sheet steel

Class2, Class P

Operating temperature: -40°C~+55°C

Comply with IEEE1789, UL8750

Model List

Model Name	Rated Input Voltage	Max Output Power(Total)	Output Current(Total)	Rated Output Voltage	Efficiency	Dimension
CVL-A1-096S024U-ND	110-277VAC	96W max.	0-4000mA	24VDC	90%	242*44.5*30.5 mm 9.5*1.7*1.2 in.
CVL-A1-096S036U-ND	110-277VAC	96W max.	0-2667mA	36VDC	90%	242*44.5*30.5 mm 9.5*1.7*1.2 in.
CVL-A1-096S048U-ND	110-277VAC	96W max.	0-2000mA	48VDC	91%	242*44.5*30.5 mm 9.5*1.7*1.2 in.

Approvals



CLASS P

Model name code

CVL-A1	=	096	S	XXX	U	=	ND
①		②	③	④	⑤		⑥


①	Series	Constant Voltage Series
②	Output power	Maximum output power: 96W
③	Output Channel	Single channel
④	Output Voltage	024=24V,036=36V,048=48V
⑤	Input voltage	110-277VAC
⑥	Dimming Control	Non-dimming

Specification:

Parameters	Symbols	Test Conditions / Comment	Min	Typ	Max	Units
INPUT						
Input Voltage	V_{IN}		100		305	V_{AC}
Rated Input Voltage	$V_{IN\ RATED}$		110		277	V_{AC}
Input Frequency	f_{line}		47	50/60	63	Hz
Input Current	I_{IN}	Full Load, $V_{IN} = 110V_{AC}$			1.05	A
Inrush Current	I_{INRUSH}	Cold Start, $V_{IN} = 277V_{AC}$			70	A
Leakage Current	$I_{Leakage}$	$V_{IN} = 277V_{AC}$, 60Hz			0.75	mA

General Characteristics


Power Factor	PF	20-100% load, $V_{IN} = 110V_{AC}$	0.9			PF
		60~100% load, $V_{IN} = 277V_{AC}$	0.9			
Total Harmonic Distortion	THD	20-100% load, $V_{IN} = 110V_{AC}$			20	%
		60~100% load, $V_{IN} = 277V_{AC}$			20	
Efficiency	η_{24V}	CVL-A1-096S024U-ND, Full load, $V_{IN} = 110V_{AC}$, Steady state	85	87		%
		CVL-A1-096S024U-ND, Full load, $V_{IN} = 277V_{AC}$, Steady state	88	90		
	η_{36V}	CVL-A1-096S036U-ND, Full load, $V_{IN} = 110V_{AC}$, Steady state	85	87		
		CVL-A1-096S036U-ND, Full load, $V_{IN} = 277V_{AC}$, Steady state	88	90		
	η_{48V}	CVL-A1-096S048U-ND, Full load, $V_{IN} = 110V_{AC}$, Steady state	86	88		
		CVL-A1-096S048U-ND, Full load, $V_{IN} = 277V_{AC}$, Steady state	89	91		
Turn On Delay Time	$T_{on, delay}$	Cold Start			0.5	S

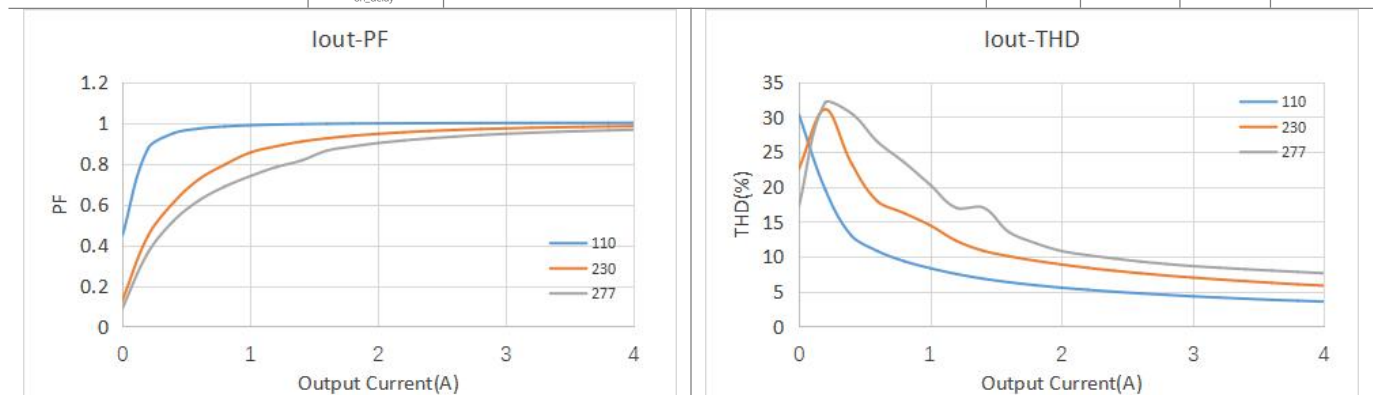

OUTPUT

Output Voltage Tolerance	t_{OUT}				5	%
No Load Output Voltage Tolerance	$t_{NO\ LOAD}$	No Load			3	%
Output Current	I_{OUT}	CVL-A1-096S024U-ND	0		4000	mA

		CVL-A1-096S036U-ND	0		2667	mA
		CVL-A1-096S048U-ND	0		2000	mA
Output Power	P_{OUT}				96	W
Line Regulation	$V_{OUT-LINE}$				1	%
Ripple Voltage	$V_{OUT-LINE}$	Full Load, (pk-to-pk)/Average			10	%
Output Voltage Overshoot	$V_{OVERSHOOT}$	Turning Power ON			10	%

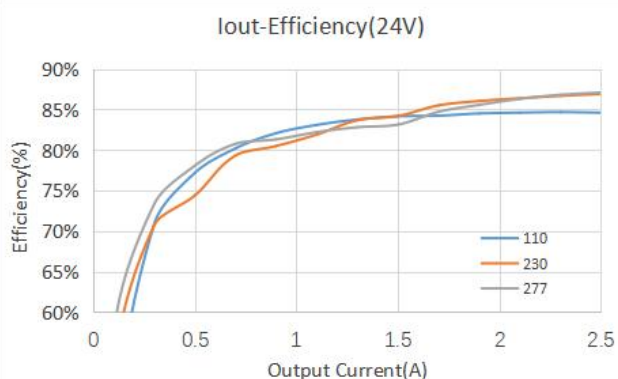

Protection

Over Voltage Protection	V_{OVP}	CVL-A1-096S024U-ND, Latch mode.	28		36	V
		CVL-A1-096S036U-ND, Latch mode.	38		44	V
		CVL-A1-096S048U-ND, Latch mode.	50		60	V
Over Current Protection	I_{OCP}	CVL-A1-096S024U-ND, Hiccup mode.	4000		4500	mA
		CVL-A1-096S036U-ND, Hiccup mode.	2667		3000	mA
		CVL-A1-096S048U-ND, Hiccup mode.	2000		2300	mA
Over Temperature Protection	T_{OTP}	If the case temperature exceeds OTP point, the output voltage of the driver is automatically reduced.	90	95	100	°C
Over Power Protection	CC/CV mode.					
Short Circuit Protection	The unit can recover automatically after fault conditions is removed.					


Environment

Storage Temperature	$T_{Storage}$	Humidity: 5% RH to 95% RH	-40	-	+85	°C
Ambient Operating Temperature	T_a		-40	-	+55	°C
Max. Case Temperature	T_c	Hot spot on case			90	°C
Operating Relative Humidity	H_a	Non-Condensing	10		90	%
Acoustic Noise		Measured from one metre			24	dBA
Cooling	Convection Cooling					
IP Rating	IP20, (IP65/Wet location, Please contact Lumigear for details)					

Others

Life Time	T_{Life}	Full Load, 80°C case temperature	50			kHrs
MTBF	T_{MTBF}	Full Load, 25°C ambient temperature	200			kHrs

Net Weight	W_{NET}		586		g
Warranty	5 Years Warranty at $T_c \leq 80^\circ\text{C}$				
Flicker	IEEE 1789, Title 24				

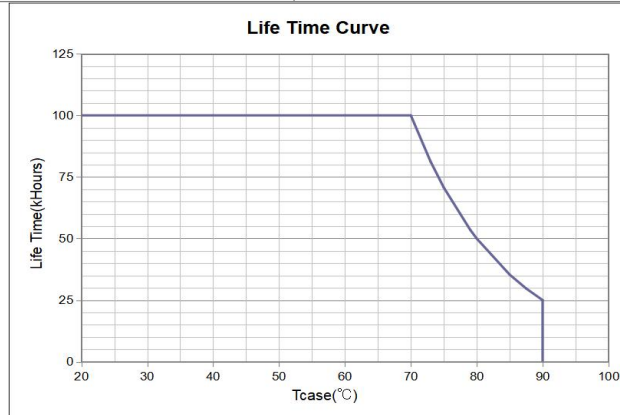

Safety Compliance

CUL/UL	UL8750, CAN/CSA-C22.2 No. 250.13
--------	----------------------------------

Electromagnetic Compliance

EMC Requirements	Standard	Conditions
EMI Emissions	FCC Title 47 Part 15B	Class B at 110VAC, Class A at 277VAC
Voltage Fluctuations and Flicker	IEC61000-3-3	
Immunity Compliance	IEC 61000-4-2	$\pm 8\text{kV}$ air Discharge, $\pm 6\text{kV}$ Contact Discharge
	ANSI/IEEE C62.41.2	2 kV combination wave
	ANSI/IEEE C62.41.1-2002	2.5kV Ring Wave, test at 30Ω 7 Strikes/1 minute interval, Common and Differential mode, 56 total strikes
	IEC 61000-4-11	>95% dip, .5 period; 30% dip, 25 periods; 95% reduction, 250 periods
	IEC 61000-4-4	$\pm 2\text{kV}$ Direct couple to Line input, 5kHz repetition rate, 15mS duration, 300mS period. 7 coupling paths, 1 minute per path (14 total combinations)

Note: Unless otherwise specified, all the above parameters are measured at ambient temperature of 25°C and rated voltage.

Packaging

Driver quantity (pcs)	Layer	Weight (kg)	Outer dimensions of Carton L*W*H(mm)
25	5	15.0	335 X 265 X 230

Mechanical Drawing:

