

Features & Benefits

Universal AC input voltage(120-277VAC and 120-347VAC)

Field or factory installation

Dry, damp and wet location design for indoor and outdoor installations

Built-in APFC

Isolated 0-10V dimming, dim down to 0.1%

Complies with leading-edge/trailing-edge dimmer

Wide load range from 10% to 100%(TRIAC Dimming)

Flicker free, excellent camera compatibility, spec-grade smoothness

All-round protection: SCP, OVP, OTP, OPP(CC/CV mode, Especially suitable for LED strip)

Constant voltage PWM style output

Class2, Class P

Operating temperature: -40°C~+55°C

Comply with IEEE1789(≥1% dimming), UL8750

Model List

Model Name	Rated Input Voltage	Max Output Power(Total)	Output Current(Total)	Rated Output Voltage	Efficiency	Dimension
CVJ-A1-192D024X-VT	120-277VAC 120-347VAC	2*96W max.	2*0-4000mA	2*24VDC	91%	248.5*115.5*40 mm 9.8*4.5*1.5 in.
CVJ-A1-192D036X-VT	120-277VAC 120-347VAC	2*96W max.	2*0-2666mA	2*36VDC	91%	248.5*115.5*40 mm 9.8*4.5*1.5 in.
CVJ-A1-192D048X-VT	120-277VAC 120-347VAC	2*96W max.	2*0-2000mA	2*48VDC	91%	248.5*115.5*40 mm 9.8*4.5*1.5 in.

Optional Function

Input voltage: 120-277VAC or 120-347VAC

Aux power, 12V/50mA

Approvals

TRIAC 0/1-10 V  CLASS P

Model name code

CVJ-A1	-	192	D	XXX	X	-	VT
①		②	③	④	⑤		⑥

①	Series	Constant Voltage Series
②	Output power	Maximum output power: 192W
③	Output Channel	Double channel
④	Output Voltage(max)	024=24V 036=36V 048=48V
⑤	Input voltage	U=120-277VAC M=120-347VAC
⑥	Dimming Control	Triac&0-10V

Specification:

Parameters	Symbols	Test Conditions / Comment	Min	Typ	Max	Units
INPUT						
Input Voltage	V_{IN}	CVJ-A1-192DXXXU-VT	108		305	V_{AC}
		CVJ-A1-192DXXXM-VT	108		382	V_{AC}
Rated Input Voltage	$V_{IN\ RATED}$	CVJ-A1-192DXXXU-VT	120		277	V_{AC}
		CVJ-A1-192DXXXM-VT	120		347	V_{AC}
Input Frequency	f_{line}		47	50/60	63	Hz
Input Current	I_{IN}	Full Load, $V_{IN} = 120V_{AC}$			2.0	A
Inrush Current	I_{INRUSH}	Cold Start, $V_{IN} = 347V_{AC}$			50	A
Leakage Current	$I_{Leakage}$	$V_{IN} = 347V_{AC}$, 60Hz			0.75	mA

General Characteristics

Power Factor	PF	CVJ-A1-192DXXXX-VT, 30~100% load, $V_{IN} = 120V_{AC}$	0.95			PF
		CVJ-A1-192DXXXX-VT, 60~100% load, $V_{IN} = 277V_{AC}$	0.9			
		CVJ-A1-192DXXXX-VT, 70~100% load, $V_{IN} = 347V_{AC}$	0.9			
Total Harmonic Distortion	THD	CVJ-A1-192DXXXX-VT, 30~100% load, $V_{IN} = 120V_{AC}$			20	%
		CVJ-A1-192DXXXX-VT, 60~100% load, $V_{IN} = 277V_{AC}$			20	
		CVJ-A1-192DXXXX-VT, 70~100% load, $V_{IN} = 347V_{AC}$			20	
Efficiency	η	Full load, $V_{IN} = 120V_{AC}$, $V_{OUT} = 24V$, Steady state	87	88		%
		Full load, $V_{IN} = 277V_{AC}$ (U type), $V_{IN} = 347V_{AC}$ (M type), $V_{OUT} = 24V$, Steady state	89	90		
		Full load, $V_{IN} = 120V_{AC}$, $V_{OUT} = 36V$, Steady state	88	89		
		Full load, $V_{IN} = 277V_{AC}$ (U type), $V_{IN} = 347V_{AC}$ (M type), $V_{OUT} = 36V$, Steady state	90	91		
		Full load, $V_{IN} = 120V_{AC}$, $V_{OUT} = 48V$, Steady state	88	89		
		Full load, $V_{IN} = 277V_{AC}$ (U type), $V_{IN} = 347V_{AC}$ (M type), $V_{OUT} = 48V$, Steady state	90	91		
Turn On Delay Time	T_{on_delay}	Cold Start			0.5	S

OUTPUT

Output Voltage Tolerance	t_{OUT}	No Dimming			3	%
No Load Output Voltage Tolerance	$t_{NO\ LOAD}$	No Load, No Dimming			1.5	%
Output Current	I_{OUT}	CVJ-A1-192D024X-VT	0		2*400 0	mA
		CVJ-A1-192D036X-VT	0		2*2666	mA
		CVJ-A1-192D048X-VT	0		2*2000	mA
Output Power	P_{OUT}				2*96	W
Line Regulation	$V_{OUT-LINE}$				1	%
Ripple Voltage	$V_{OUT-LINE}$	Full Load, (pk-to-pk)/Average			5	%

Output Voltage Overshoot	$V_{\text{OVERSHOOT}}$	Turning Power ON			10	%
--------------------------	------------------------	------------------	--	--	----	---

0~10V or Resistor Dimming

The 0~10V or resistor dimming can be used to dim the output voltage via a standard commercial wall dimmer (0~10VDC) or an external control voltage source (0~10VDC) or external resistor. The unit can be compatible with both sink and source current dimmers.

Dimming Curve	Linear. please see "Dimming curve".					
Absolute Maximum Voltage on 0~10V Pin	V_{DIM}		0		10	V
Source Current on 0~10V Dimming Pin	I_{DIM}			200		uA
Light On	$V_{\text{DIM-on}}$	With AUX power version		0.6		V
Light Off	$V_{\text{DIM-off}}$	With AUX power version		0.5		V
Dimming Voltage for Full Bright	$V_{\text{DIM-MAX}}$		8			V
Leakage Voltage	$V_{\text{Leak-rms}}$	Voltage between DIM- and Ground			10	V_{AC}

Triac Dimming(Optional)

The unit is compatible With Leading-edge and Trailing-edge Dimmer.

Input Voltage	$V_{\text{IN-TRIAC DIM}}$			120		V_{AC}
Dim Output Voltage	$V_{\text{OUT-TRIAC}}$	PWM Output	0	-	100	% of V_{OUT}
Suggest Load Range	P_{suggest}	$V_{\text{IN}} = 120 V_{\text{AC}}$	10		100	%

Auxiliary source (Optional)

Voltage range	V_{AUX}	Standard product	11.4	12	12.6	Vdc
Current range	I_{AUX}	$V_{\text{AUX}}=12\text{V}$			50	mA
Output Power	P_{AUX}				0.6	W
Voltage tolerance	t_{AUX}				8	%

Protection

Over Voltage Protection	V_{OVP}	CVJ-A1-192D024X-VT, Latch mode.	28		36	V
		CVJ-A1-192D036X-VT, Latch mode.	40		47	V
		CVJ-A1-192D048X-VT, Latch mode.	56		63	V
Over Current Protection	I_{OCP}	CVJ-A1-192D024X-VT, Hiccup mode.	8000		9000	mA
		CVJ-A1-192D036X-VT, Hiccup mode.	5332		6000	mA
		CVJ-A1-192D048X-VT, Hiccup mode.	4000		4500	mA
Over Temperature Protection	T_{OTP}	If the case temperature exceeds OTP point, the output voltage of the driver is automatically reduced.	90	95	100	°C
Over Power Protection	CC/CV mode.					
Short Circuit Protection	The unit can recover automatically after fault conditions is removed.					


Environment

Storage Temperature	T_{Storage}	Humidity: 5% RH to 95% RH	-40	-	+85	°C
Ambient Operating	T_{a}		-35	-	+50	°C

Temperature						
Max. Case Temperature	T_c	Hot spot on case			90	°C
Operating Relative Humidity	H_a	Non-Condensing	10		90	%
Acoustic Noise		Measured from 1 m w/o dimmer.			24	dBA
Cooling	Convection Cooling					
IP Rating	Dry and damp UL approved					

Others

Life Time	T_{Life}	Full Load, 80°C case temperature	50			kHrs
MTBF	T_{MTBF}	Full Load, 25°C ambient temperature	200			kHrs
Net Weight	W_{NET}			400		g
Warranty	5 Years Warranty at $T_c \leq 80^\circ\text{C}$					
Flicker	IEEE 1789($\geq 1\%$ dimming), Title 24					

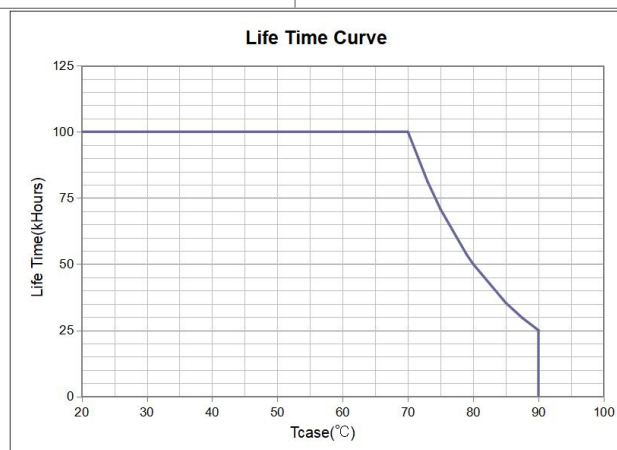

Safety Compliance


CUL/UL	UL8750, CAN/CSA-C22.2 No. 250.13
--------	----------------------------------

Electromagnetic Compliance

EMC Requirements	Standard	Conditions
EMI Emissions	FCC Title 47 Part 15B	Class A at 120VAC, Class A at 277VAC & 347VAC
Voltage Fluctuations and Flicker	IEC61000-3-3	
Immunity Compliance	IEC 61000-4-2	$\pm 8\text{kV}$ air Discharge, $\pm 6\text{kV}$ Contact Discharge
	IEC 61000-4-5 or ANSI/IEEE C62.41-2002	$\pm 4\text{kV}$ Common Mode(12 Ω), $\pm 2\text{kV}$ Differential Mode(2 Ω), 5 strikes/1minute interval (40 total strikes)
	ANSI/IEEE C62.41.1-2002	2.5kV Ring Wave, test at 30 Ω 7 Strikes/1 minute interval, Common and Differential mode, 56 total strikes
	IEC 61000-4-11	>95% dip, .5 period; 30% dip, 25 periods; 95% reduction, 250 periods
	IEC 61000-4-4	$\pm 2\text{kV}$ Direct couple to Line input, 5kHz repetition rate, 15mS duration, 300mS period. 7 coupling paths, 1 minute per path (14 total combinations)

Note: Unless otherwise specified, all the above parameters are measured at ambient temperature of 25°C and rated voltage.

Typical Application

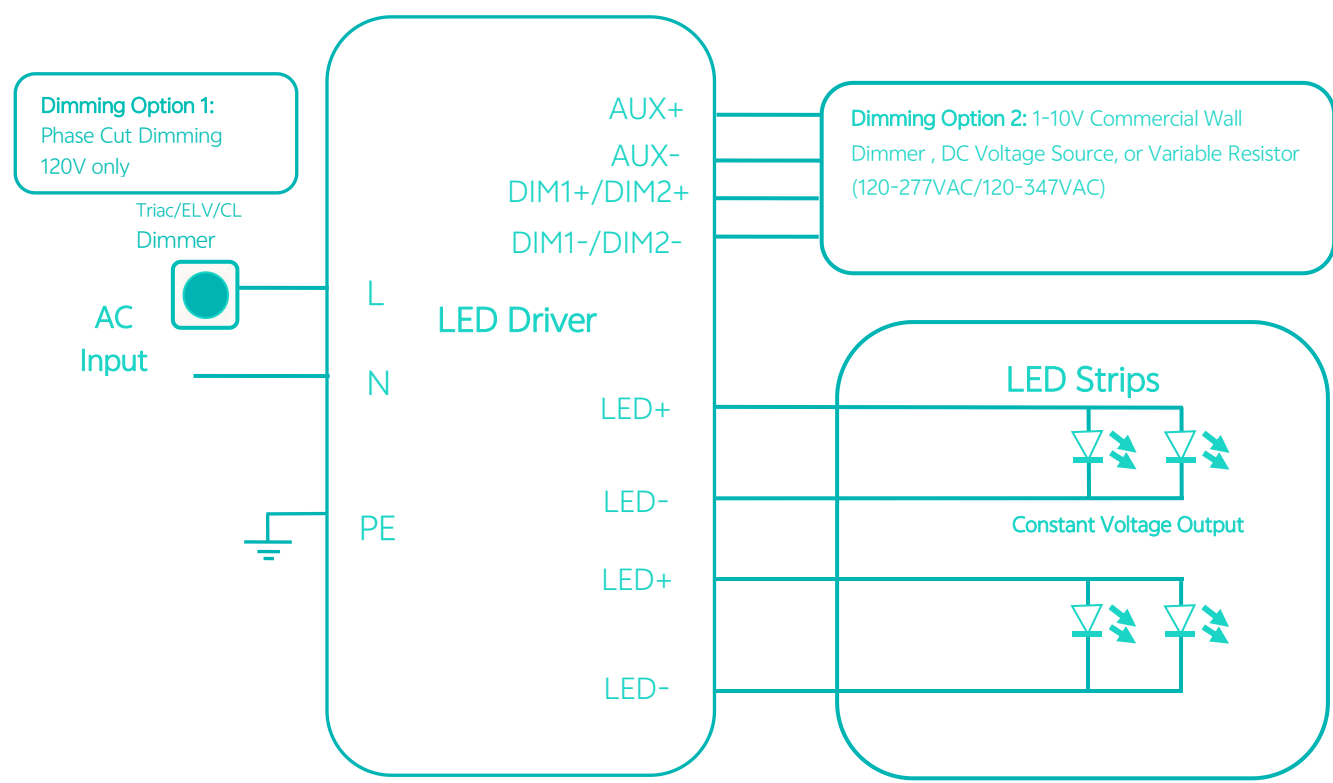

Packaging

Driver quantity (pcs)	Layer	Weight (kg)	Outer dimensions of Carton L*W*H(mm)
12	3	20	505 X 400 X 250

Mechanical Drawing:

