



AFP-A1-030S0850U-T-PC
Constant Current LED Driver

- BLK(L)
- WHI(N) Class 2
- GRN(PE) Class P

TRIAC Dimming@120Vac only

Input:120-277Vac 50/60Hz 0.34Amax
Output:20-42Vdc 850mA30Wmax

Tc

FC RoHS

UL LISTED

CAUTION:
For connections use wire rated for at least 90°C(194°F).
Disconnect line voltage before installing or replacing.
Dry or Damp Locations only.
Ground enclosure in installation.

Made in Vietnam

RED(LED+) ●

BLU(LED-) ●

Features & Benefits

Universal AC input voltage(120-277VAC, Triac dimming@120VAC)

Compact design, silicone potted for better thermal performance

Programmable features:

Output current(1mA step)

Over Temperature Protection: Foldback mode, Linear decrease mode

Programmable RMS voltage with turn-on , turn-off and full brightness

Phase cut dimming, dim down to 1%

Suitable for indoor use

UL Class2, Class P

Combination Wave 2KV, Ringwave 2.5KV

Operating temperature: -25°C~+55°C

Comply with Title 24, UL8750

Model List

Model Name	Rated Input Voltage	Max Output Power(Total)	Output Current(Total)	Rated Output Voltage	Efficiency	Dimension
AFP-A1-015S0420U-T-PC	120-277VAC	15W max.	150-420mA	20-42VDC	88%	78.4*35.2*24.8 mm 3.1×1.4×1.0 in.
AFP-A1-030S0850U-T-PC	120-277VAC	30W max.	300-850mA	20-42VDC	89%	78.4*35.2*24.8 mm 3.1×1.4×1.0 in.

Approvals

TRIAC CLASS P

Model name code

AFP-A1	-	030	S	0850	U	-	I	-	PC
①		②	③	④	⑤		⑥		⑦


①	Series	Architecture FlexFit Series
②	Output power	Maximum output power: 30W
③	Output Channel	Single channel
④	Output current(max)	Maximum output current: 850mA
⑤	Input voltage	120-277VAC
⑥	Dimming Control	TRIAC
⑦	Programmable	USB-PC

Specification:

Parameters	Symbols	Test Conditions / Comment	Min	Typ	Max	Units
------------	---------	---------------------------	-----	-----	-----	-------

INPUT

Input Voltage	V _{IN}								108		305	V _{AC}	
Rated Input Voltage	V _{IN RATED}								120		277	V _{AC}	
	V _{IN RATED_TRIAC}	Phase Cut Dimming								120		V _{AC}	
Input Frequency	f _{line}								47	50/60	63	Hz	
Input Current	I _{IN}	AFP-A1-015, Full Load, V _{IN} = 120V _{AC}									0.17	A	
		AFP-A1-030, Full Load, V _{IN} = 120V _{AC}									0.34	A	
Inrush Current	I _{INRUSH}	Cold Start, V _{IN} = 277V _{AC}									30	A	
Leakage Current	I _{Leakage}	V _{IN} = 277V _{AC} 60Hz									0.75	mA	
Number of Drivers per MCB(Circuit Breaker)	MCB type	B10	C10	D10	B13	C13	D13	B16	C16	D16	B20	C20	D20
	120V _{AC}	16	18	21	21	24	28	26	30	34	32	37	43
	277V _{AC}	15	25	50	19	32	65	24	40	81	30	50	101

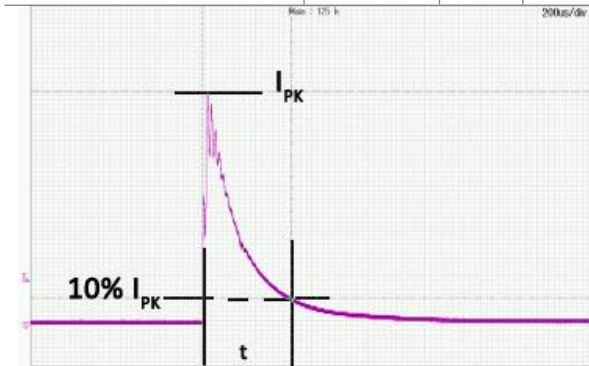

Input Voltage	Inrush Current	t(us)10%-10%
120VAC	8.0A	254
277VAC	15.8A	208
347VAC	NA	NA

General Characteristics

Power Factor	PF	20-100% load, $V_{IN} = 120V_{AC}$	0.9			PF
		45-100% load, $V_{IN} = 277V_{AC}$	0.9			
Total Harmonic Distortion	THD	20-100% load, $V_{IN} = 120V_{AC}$			20	%
		45-100% load, $V_{IN} = 277V_{AC}$			20	%
Turn On Delay Time	T_{on_delay}	Cold Start, Without Dimmer			0.5	S
		Cold Start, 1% Dimming, $V_{out}=36V$			1.0	S
Efficiency	η	AFP-A1-015, $I_{OUT}=300mA$, $V_{IN}=120V_{AC}$, Steady state	85	87		%
		AFP-A1-030, $I_{OUT}=650mA$, $V_{IN}=120V_{AC}$, Steady state	86	88		%
		AFP-A1-015, $I_{OUT}=300mA$, $V_{IN}=277V_{AC}$, Steady state	86	88		%
		AFP-A1-030, $I_{OUT}=650mA$, $V_{IN}=277V_{AC}$, Steady state	87	89		%

OUTPUT

Output Current Tolerance	t	$I_{OUT}=(40-100\%)I_{MAX}$			5	%
		$I_{OUT}=(10-39\%)I_{MAX}$			7	%
Output Current Range	I_{OUT}	AFP-A1-015	4.2		420	mA

		AFP-A1-030	8.5		850	mA
Output Voltage	V_{OUT}		20		42	V
Line Regulation	$V_{OUT-LINE}$				5	%
Load Regulation	$I_{OUT-LOAD}$	V_{OUT} from MIN. to MAX.			5	%
Ripple Current	$I_{OUT-RIPPLE}$	Full Load, $(I_{Omax}-I_{Omin})/(I_{Omax}+I_{Omin})$			30	%
Output Current Overshoot	$I_{OVERSHOOT}$	Turning Power ON			10	%

Phase Cut Dimming

The unit is compatible With Leading-edge and Trailing-edge Dimmer.

Input Voltage	$V_{IN-TRIAC DIM}$			120		V_{AC}
Suggest Load Range	$P_{Suggest}$	$V_{IN} = 120 V_{AC}$	40		100	%

Compatible Phase Cut Dimmer List

No.	Mfg.	Model	Remark	No.	Mfg.	Model	Remark
1	Lutron	MACL-153M		6	Lutron	DVELV-300P	
2	Lutron	DVRP-253P		7	Lutron	NTELV-300	
3	Lutron	PD-6WCL		8	Lutron	DVCL-153P	
4	Lutron	PD-5NE		9	Leviton	IPE04	
5	Lutron	MA-PRO		10	Leviton	DSE06	


Programming

The driver is programmable , Please contact LUMIGEAR for details.

NO.	Item	Default Setting			
1	Output current(1mA step)	See”Model list” for each model			
2	Over Temperature Protection: Foldback mode, Linear decrease mode	See “Protection” section			
3	Programmable RMS voltage with turn-on , turn-off and full brightness for phase cut dimming	Turn on at 18V _{AC} , turn off at 15V _{AC} , Clamp at 30V _{AC} , full brightness at 108V _{AC}			
P2.0 Female Plug Caution: Programming port is NOT isolated from primary side	Programming software	“LUMIGEAR Programming Tool”			
	Programming tool	“Lumigear tool box”			
	Operating voltage			5	

Protection

Over Voltage Protection	V_{OVP}	The unit will recover automatically after fault conditions is removed.		60		V
Over Temp. Protection	T_{OTP}	Current linear reduced when hotspot greater than T_{OTP}		95		°C
Short Circuit Protection	The unit will recover automatically after fault conditions is removed.					

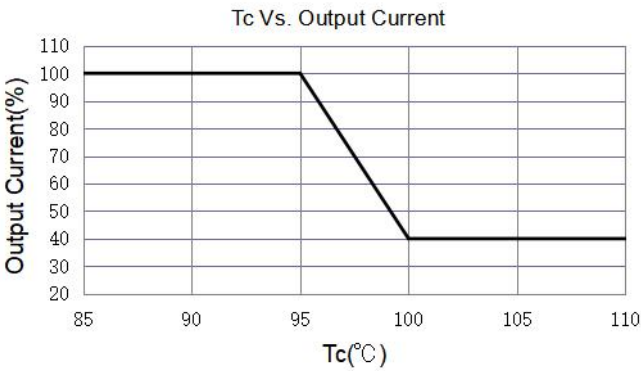


Environment


Storage Temperature	$T_{Storage}$	Humidity: 5% RH to 95% RH	-40	-	+85	°C
Ambient Operating Temperature	T_a		-25	-	+55	°C
Max. Case Temperature	T_c	Hot spot on case			90	°C
Operating Relative Humidity	H_a	Non-Condensing	10		90	%
Acoustic Noise		Measured from 1 meter			24	dBA
Cooling	Convection Cooling					
IP Rating	Dry and damp UL approved					

Others

Life Time	T_{Life}	AFP-A1-015, Full load, 80°C case temperature	50			kHrs
		AFP-A1-030, Full load, 85°C case temperature	50			kHrs
SVEF	T_{SVEF}	Full Load, 25°C ambient temperature	200			kHrs
Net Weight	W_{NET}			TBD		g
Warranty	AFP-A1-015, 5 Years Warranty at $T_c \leq 80^\circ\text{C}$					
	AFP-A1-030, 5 Years Warranty at $T_c \leq 85^\circ\text{C}$					
Flicker	Title 24					

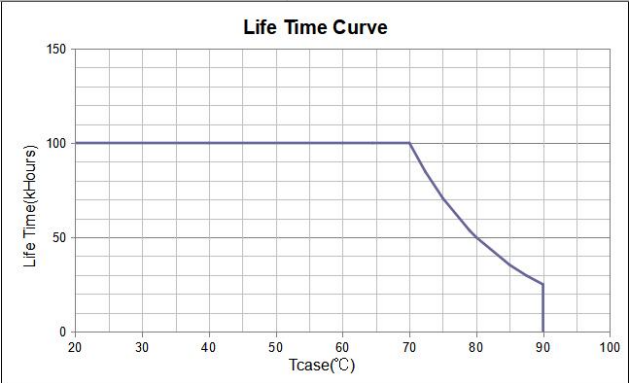

AFP-A1-015 life time curve

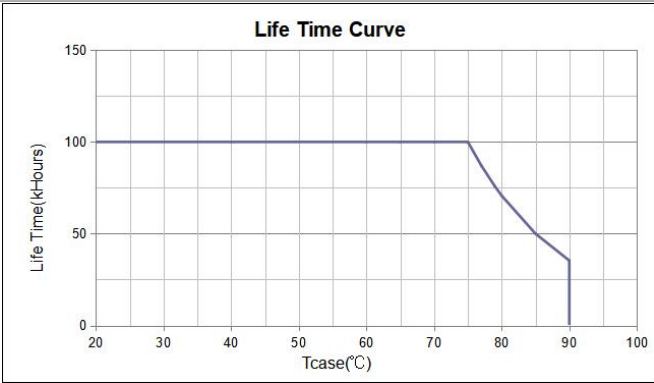

AFP-A1-030 life time curve

Safety Compliance

CUL/UL


UL8750, CAN/CSA-C22.2 No. 250.13

Electromagnetic Compliance

EMC Requirements	Standard	Conditions
EMI Emissions	FCC Title 47 Part 15	Class B at 120V _{AC} , Class A at 277V _{AC}
Voltage Fluctuations and Flicker	IEC61000-3-3	
Immunity Compliance	IEC 61000-4-2	±8kV air Discharge, ±6kV Contact Discharge
	ANSI/IEEE C62.41-2002	± 2kV Common and Differential Mode, test at 2 Ω, 5 strikes/1minute interval (40 total strikes)
	ANSI/IEEE C62.41.1-2002	2.5kV Ring Wave, test at 30Ω 7 Strikes/1 minute interval, Common and Differential mode, 56 total strikes
	IEC 61000-4-11	>95% dip, 5 period; 30% dip, 25 periods; 95% reduction, 250 periods
	IEC 61000-4-4	± 2kV Direct couple to Line input, 5kHz repetition rate, 15mS duration, 300mS period. 7 coupling paths, 1 minute per path (14 total combinations)

Note: Unless otherwise specified, all the above parameters are measured at ambient temperature of 25°C and rated voltage.

Typical Application

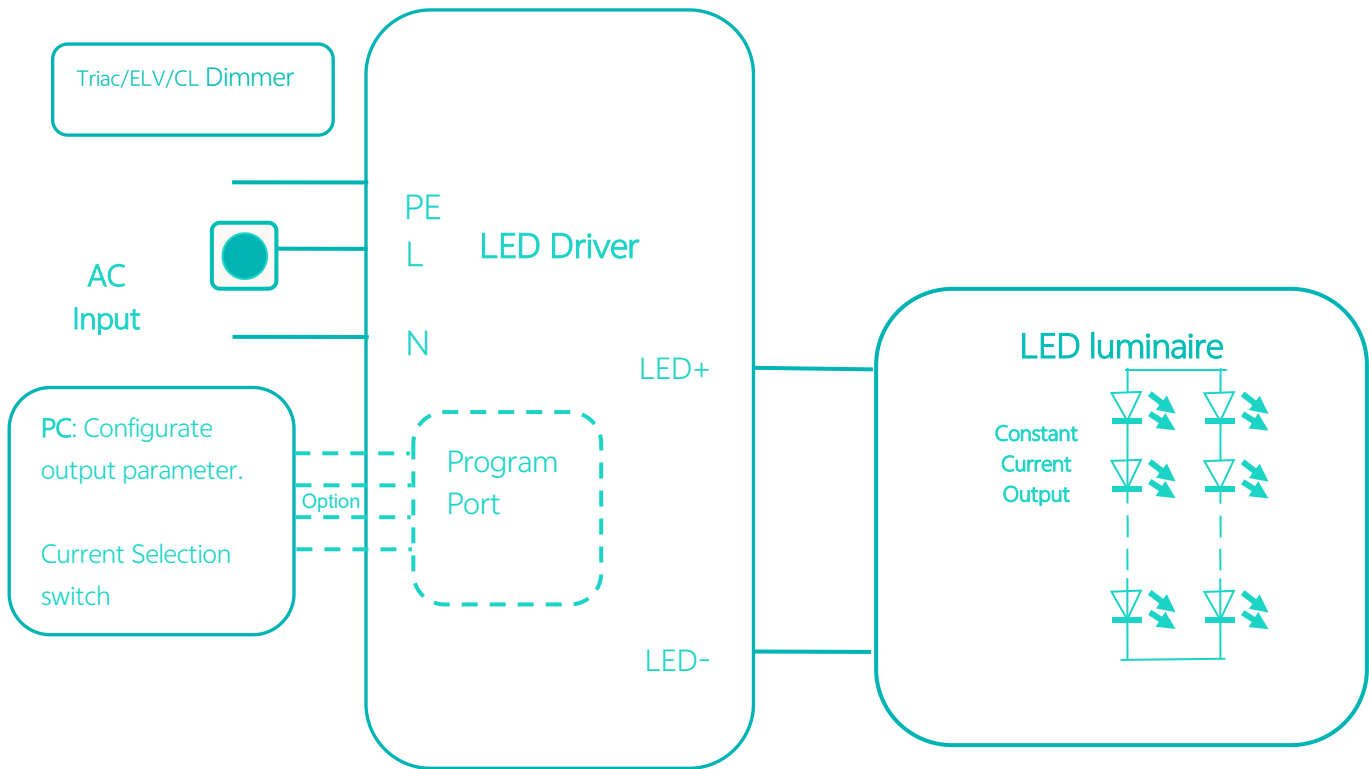

Packaging

Driver quantity (pcs)	Layer	Weight (kg)	Outer dimensions of Carton L*W*H(mm)
TBD	TBD	TBD	TBD

Mechanical Drawing:

