

## Features & Benefits

- Universal AC input voltage(110-277VAC)
- All-round protection: SCP, OVP, OTP, OPP(CC/CV mode, especially suitable for LED strip)
- Flicker free, excellent camera compatibility, spec-grade smoothness
- Painted sheet steel
- Class2, Class P
- Operating temperature: -40°C~+55°C
- Comply with IEEE1789, UL8750

## Model List

Model Name	Rated Input Voltage	Max Output Power(Total)	Output Current(Total)	Rated Output Voltage	Efficiency	Dimension
CVL-A1-096S024U-ND	110-277VAC	96W max.	0-4000mA	24VDC	90%	242*44.5*30.5 mm 9.5*1.7*1.2 in.
CVL-A1-096S036U-ND	110-277VAC	96W max.	0-2667mA	36VDC	90%	242*44.5*30.5 mm 9.5*1.7*1.2 in.
CVL-A1-096S048U-ND	110-277VAC	96W max.	0-2000mA	48VDC	91%	242*44.5*30.5 mm 9.5*1.7*1.2 in.

## Approvals



## Model name code

<u>CVL-A1</u>	-	<u>096S</u>	<u>XXX</u>	<u>U</u>	-	<u>ND</u>
①		②	③	④		⑤



①	Series	CVL Series
②	Output power	Maximum output power: 96W
③	Output Voltage	024=24V,036=36V,048=48V
④	Input voltage	110-277VAC
⑤	Dimming Control	Non-dimming

## Specification:

Parameters	Symbols	Test Conditions / Comment	Min	Typ	Max	Units
<b>INPUT</b>						
Input Voltage	$V_{IN}$		100		305	$V_{AC}$
Rated Input Voltage	$V_{IN\ RATED}$		110		277	$V_{AC}$
Input Frequency	$f_{line}$		47	50/60	63	Hz
Input Current	$I_{IN}$	Full Load, $V_{IN} = 110V_{AC}$			1.05	A
Inrush Current	$I_{INRUSH}$	Cold Start, $V_{IN} = 277V_{AC}$			70	A
Leakage Current	$I_{Leakage}$	$V_{IN} = 277V_{AC}$ , 60Hz			0.75	mA

## General Characteristics


Power Factor	PF	20-100% load, $V_{IN} = 110V_{AC}$	0.9			PF
		60~100% load, $V_{IN} = 277V_{AC}$	0.9			
Total Harmonic Distortion	THD	20-100% load, $V_{IN} = 110V_{AC}$			20	%
		60~100% load, $V_{IN} = 277V_{AC}$			20	
Efficiency	$\eta_{24V}$	CVL-A1-096S024U-ND, Full load, $V_{IN} = 110V_{AC}$ , Steady state	85	87		%
		CVL-A1-096S024U-ND, Full load, $V_{IN} = 277V_{AC}$ , Steady state	88	90		
	$\eta_{36V}$	CVL-A1-096S036U-ND, Full load, $V_{IN} = 110V_{AC}$ , Steady state	85	87		
		CVL-A1-096S036U-ND, Full load, $V_{IN} = 277V_{AC}$ , Steady state	88	90		
	$\eta_{48V}$	CVL-A1-096S048U-ND, Full load, $V_{IN} = 110V_{AC}$ , Steady state	86	88		
		CVL-A1-096S048U-ND, Full load, $V_{IN} = 277V_{AC}$ , Steady state	89	91		
Turn On Delay Time	$T_{on, delay}$	Cold Start			0.5	S

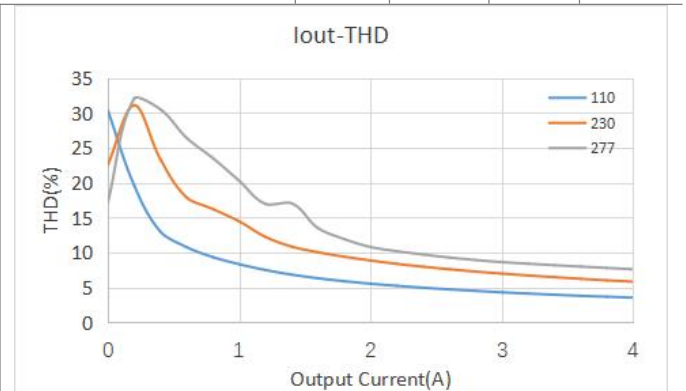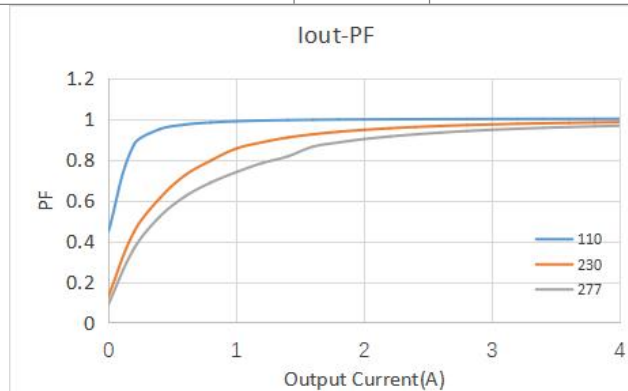

## OUTPUT

Output Voltage Tolerance	$t_{OUT}$				5	%
No Load Output Voltage Tolerance	$t_{NO\ LOAD}$	No Load			3	%
Output Current	$I_{OUT}$	CVL-A1-096S024U-ND	0		4000	mA

		CVL-A1-096S036U-ND	0	2667	mA
		CVL-A1-096S048U-ND	0	2000	mA
Output Power	$P_{OUT}$			96	W
Line Regulation	$V_{OUT-LINE}$			1	%
Ripple Voltage	$V_{OUT-LINE}$	Full Load, (pk-to-pk)/Average		10	%
Output Voltage Overshoot	$V_{OVERSHOOT}$	Turning Power ON		10	%

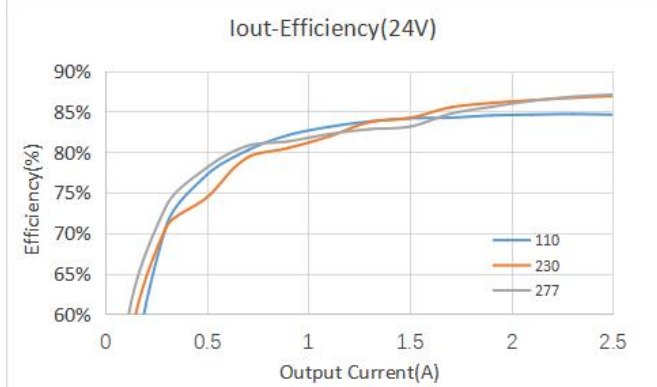

## Protection

Over Voltage Protection	$V_{OVP}$	CVL-A1-096S024U-ND, Latch mode.	28		36	V
		CVL-A1-096S036U-ND, Latch mode.	38		44	V
		CVL-A1-096S048U-ND, Latch mode.	50		60	V
Over Current Protection	$I_{OCP}$	CVL-A1-096S024U-ND, Hiccup mode.	4000		4500	mA
		CVL-A1-096S036U-ND, Hiccup mode.	2667		3000	mA
		CVL-A1-096S048U-ND, Hiccup mode.	2000		2300	mA
Over Temperature Protection	$T_{OTP}$	If the case temperature exceeds OTP point, the output voltage of the driver is automatically reduced.	90	95	100	°C
Over Power Protection	CC/CV mode.					
Short Circuit Protection	The unit can recover automatically after fault conditions is removed.					


## Environment

Storage Temperature	$T_{Storage}$	Humidity: 5% RH to 95% RH	-40	-	+85	°C
Ambient Operating Temperature	$T_a$		-40	-	+55	°C
Max. Case Temperature	$T_c$	Hot spot on case			90	°C
Operating Relative Humidity	$H_a$	Non-Condensing	10		90	%
Acoustic Noise		Measured from one metre			24	dBA
Cooling	Convection Cooling					
IP Rating	IP20, (IP65/Wet location, Please contact Lumigear for details)					

## Others

Life Time	$T_{Life}$	Full Load, 80°C case temperature	50			kHrs
MTBF	$T_{MTBF}$	Full Load, 25°C ambient temperature	200			kHrs

Net Weight	$W_{NET}$		586		g
Warranty	5 Years Warranty at $T_c \leq 80^\circ\text{C}$				
Flicker	IEEE 1789, Title 24				

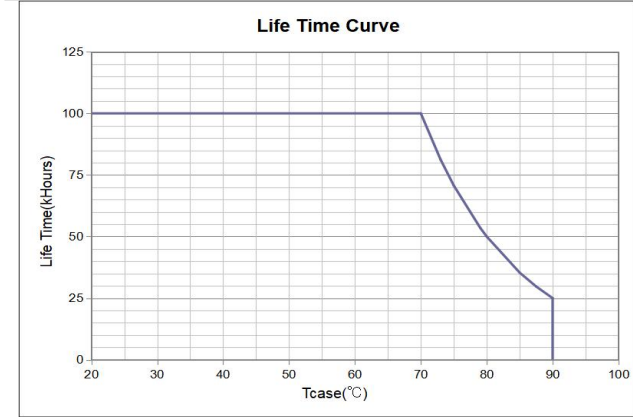

## Safety Compliance

CUL/UL	UL8750, CAN/CSA-C22.2 No. 250.13
--------	----------------------------------

## Electromagnetic Compliance

EMC Requirements	Standard	Conditions
EMI Emissions	FCC Title 47 Part 15B	Class B at 110VAC, Class A at 277VAC
Voltage Fluctuations and Flicker	IEC61000-3-3	
Immunity Compliance	IEC 61000-4-2	$\pm 8\text{kV}$ air Discharge, $\pm 6\text{kV}$ Contact Discharge
	ANSI/IEEE C62.41.2	2 kV combination wave
	ANSI/IEEE C62.41.1-2002	2.5kV Ring Wave, test at $30\Omega$ 7 Strikes/1 minute interval, Common and Differential mode, 56 total strikes
	IEC 61000-4-11	>95% dip, .5 period; 30% dip, 25 periods; 95% reduction, 250 periods
	IEC 61000-4-4	$\pm 2\text{kV}$ Direct couple to Line input, 5kHz repetition rate, 15mS duration, 300mS period. 7 coupling paths, 1 minute per path (14 total combinations)

Note: Unless otherwise specified, all the above parameters are measured at ambient temperature of  $25^\circ\text{C}$  and rated voltage.

## Packaging

Driver quantity (pcs)	Layer	Weight (kg)	Outer dimensions of Carton L*W*H(mm)
25	5	15.0	335 X 265 X 230

## Mechanical Drawing:

