

## Features & Benefits

- Universal AC input voltage(110~277VAC)
- All-round protection: SCP, OVP, OTP, OPP(CC/CV mode, especially suitable for LED strip)
- Flicker free, excellent camera compatibility, spec-grade smoothness
- Isolated 0-10Vdimming, PWM output, down to 0.1% dimming level
- Painted sheet steel
- Class2, Class P
- Operating temperature: -40°C~+55°C
- Comply with IEEE1789, UL8750

## Model List

Model Name	Rated Input Voltage	Max Output Power(Total)	Output Current(Total)	Rated Output Voltage	Efficiency	Dimension
CVL-B1-060S012U-V	110-277VAC	60W max.	0-5000mA	12VDC	87%	242*44.5*30.5 mm 9.5*1.7*1.2 in.
CVL-B1-060S024U-V	110-277VAC	60W max.	0-2500mA	24VDC	87%	242*44.5*30.5 mm 9.5*1.7*1.2 in.

## Optional Function

Aux power of 12V/100mA

Category B 6KV/IP65

## Approvals



## Model name code

CVL-B1	-	060S	XXX	U	-	V
①		②	③	④		⑤


①	Series	CVL Series
②	Output power	Maximum output power: 60W
③	Output Voltage	012=12V,024=24V
④	Input voltage	120-277VAC
⑤	Dimming Control	0-10V

## Specification:

Parameters	Symbols	Test Conditions / Comment	Min	Typ	Max	Units
<b>INPUT</b>						
Input Voltage	$V_{IN}$		100		305	$V_{AC}$
Rated Input Voltage	$V_{IN\,RATED}$		110		277	$V_{AC}$
Input Frequency	$f_{line}$		47	50/60	63	Hz
Input Current	$I_{IN}$	Full Load, $V_{IN} = 110V_{AC}$			0.7	A
Inrush Current	$I_{INRUSH}$	Cold Start, $V_{IN} = 277V_{AC}$			70	A
Leakage Current	$I_{Leakage}$	$V_{IN} = 277V_{AC}$ , 60Hz			0.75	mA



## General Characteristics

Power Factor	PF	20~100% load, $V_{IN} = 110V_{AC}$	0.9			PF
		60~100% load, $V_{IN} = 277V_{AC}$	0.9			
Total Harmonic Distortion	THD	20~100% load, $V_{IN} = 110V_{AC}$			20	%
		60~100% load, $V_{IN} = 277V_{AC}$			20	
Efficiency	$\eta_{12V}$	CVL-B1-060S012U-V, Full load, $V_{IN} = 110V_{AC}$ , Steady state	82	84		%
		CVL-B1-060S012U-V, Full load, $V_{IN} = 277V_{AC}$ , Steady state	85	87		
	$\eta_{24V}$	CVL-B1-060S024U-V, Full load, $V_{IN} = 110V_{AC}$ , Steady state	83	85		
		CVL-B1-060S024U-V, Full load, $V_{IN} = 277V_{AC}$ , Steady state	85.5	87.5		
Turn On Delay Time	$T_{on\,delay}$	Cold Start			0.5	S

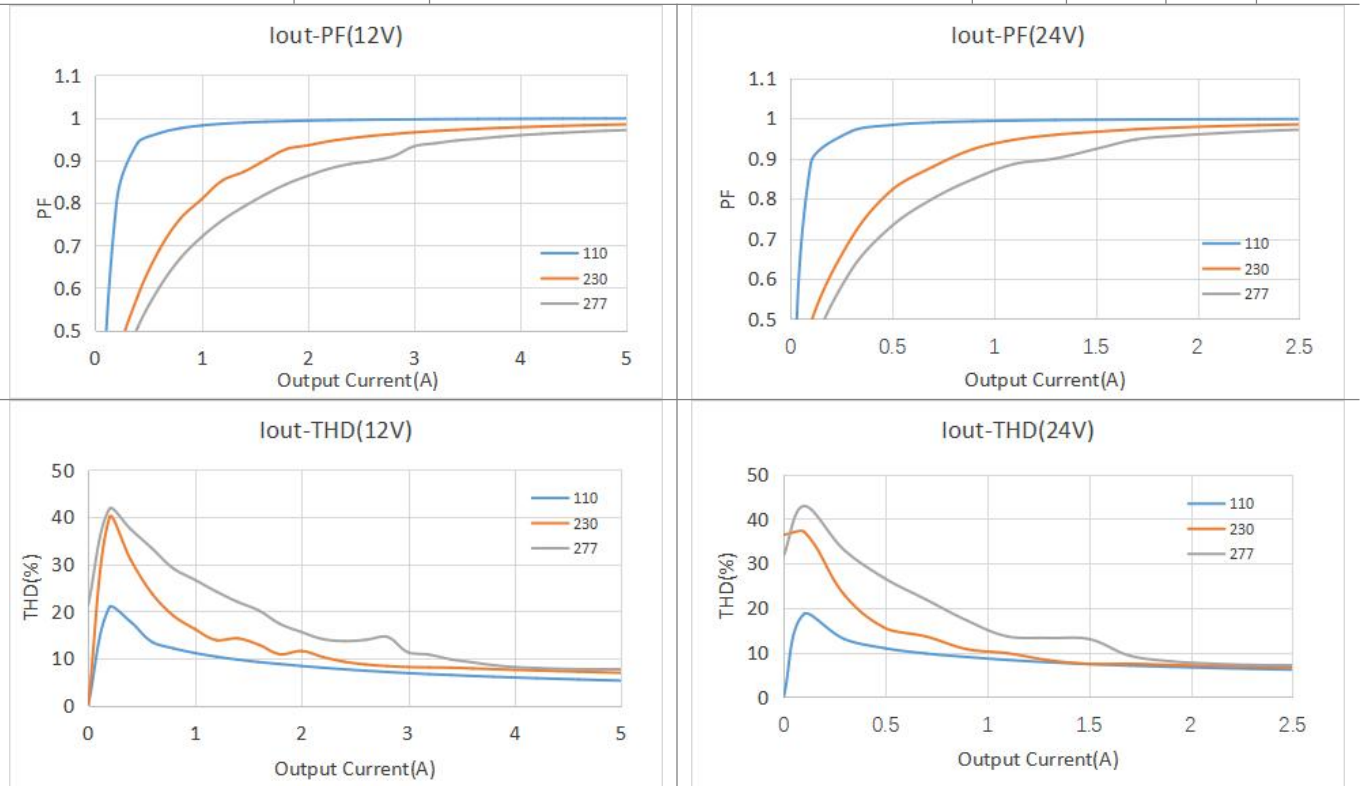

## OUTPUT



Output Voltage Tolerance	$t_{OUT}$	No Dimming			5	%
No Load Output Voltage Tolerance	$t_{NO\ LOAD}$	No Load, No Dimming			3	%
Output Current	$I_{OUT}$	CVL-B1-060S012U-V	0		5000	mA
		CVL-B1-060S024U-V	0		2500	mA
Output Power	$P_{OUT}$				60	W
Line Regulation	$V_{OUT-LINE}$				1	%
Ripple Voltage	$V_{OUT-LINE}$	Full Load, (pk-to-pk)/Average, Without Dimmer			10	%
Output Voltage Overshoot	$V_{OVERSHOOT}$	Turning Power ON			10	%

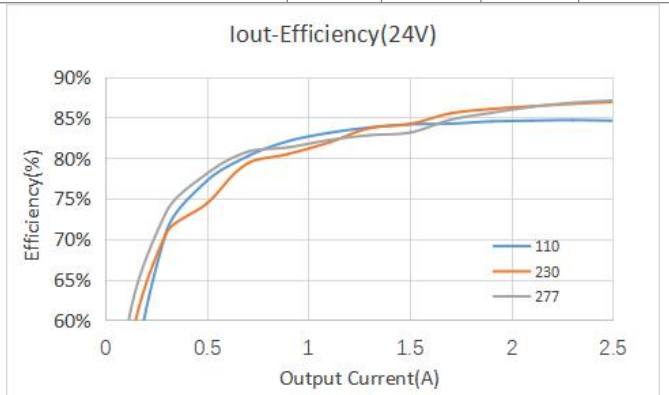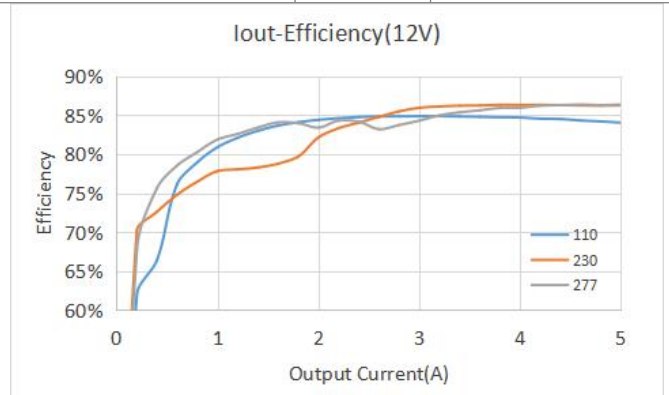

## 0~10V

The 0~10V dimming can be used to dim the output voltage via a standard commercial wall dimmer (0~10VDC) or an external control voltage source (0~10VDC) or external resistor. The unit can be compatible with both sink and source current dimmers.

Dimming Curve	Linear. please see "Dimming curve".					
Absolute Maximum Voltage on 0~10V Pin	$V_{DIM}$		0		50	V
Source Current on 0~10V Dimming Pin	$I_{DIM}$			200		uA
Light On	$V_{DIM-on}$			0.9		V
Light Off	$V_{DIM-off}$			0.7		V
Clamp voltage at Min. dimming level	$V_{DIM-Clamp}$			1		V
Dimming Voltage for Full Bright	$V_{DIM-MAX}$			8		V

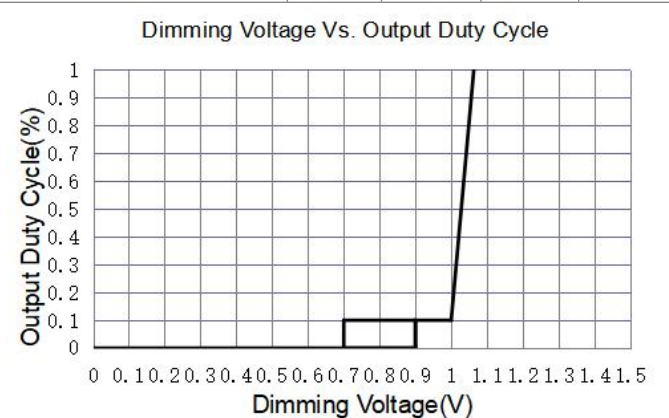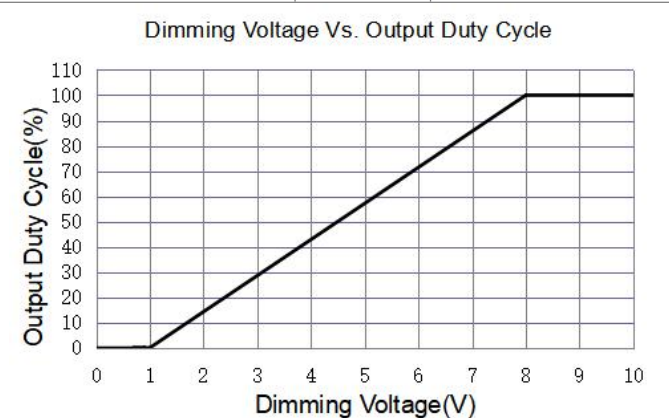

## Auxiliary source (Optional)

Voltage range	$V_{AUX}$	Standard product	11	12	13	Vdc
Current range	$I_{AUX}$	$V_{AUX}=12V$			100	mA
Output Power	$P_{AUX}$			1.2		W

## Protection


Over Voltage Protection	$V_{OVP}$	CVL-B1-060S012U-V, Latch mode.	14		17	V
		CVL-B1-060S024U-V, Latch mode.	28		36	V
Over Current Protection	$I_{OCP}$	CVL-B1-060S012U-V, Hiccup mode.	5000		5500	mA
		CVL-B1-060S024U-V, Hiccup mode.	2500		3000	mA
Over Temperature Protection	$T_{OTP}$	If the case temperature exceeds OTP point, the output voltage of the driver is automatically reduced.	90	95	100	°C
Over Power Protection	CC/CV mode.					
Short Circuit Protection	The unit can recover automatically after fault conditions is removed.					

## Environment

Storage Temperature	$T_{Storage}$	Humidity: 5% RH to 95% RH	-40	-	+85	°C
Ambient Operating Temperature	$T_a$		-40	-	+55	°C
Max. Case Temperature	$T_c$	Hot spot on case			90	°C
Operating Relative Humidity	$H_a$	Non-Condensing	10		90	%
Acoustic Noise		Measured from 1 m w/o dimmer.			24	dB(A)
Cooling	Convection Cooling					
IP Rating	IP20, (IP65/Wet location, Please contact Lumigear for details)					

## Others

Life Time	$T_{Life}$	Full Load, 80°C case temperature	50			kHrs
MTBF	$T_{MTBF}$	Full Load, 25°C ambient temperature	200			kHrs
Net Weight	$W_{NET}$			586		g
Warranty	5 Years Warranty at $T_c \leq 80^\circ C$					
Flicker	IEEE 1789(≥1% dimming), Title 24					

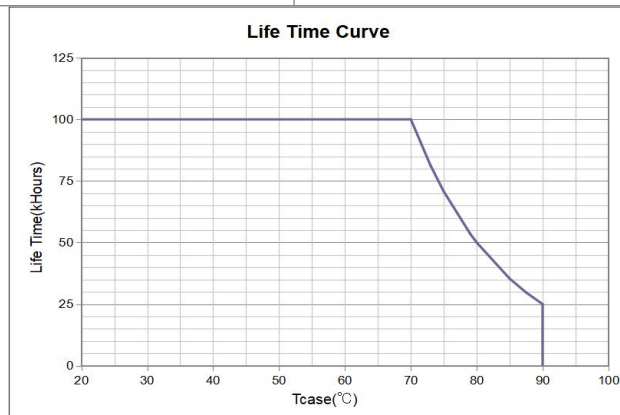

## Safety Compliance


CUL/UL	UL8750, CAN/CSA-C22.2 No. 250.13
--------	----------------------------------

## Electromagnetic Compliance

EMC Requirements	Standard	Conditions
EMI Emissions	FCC Title 47 Part 15B	Class B at 110VAC, Class A at 277VAC
Voltage Fluctuations and Flicker	IEC61000-3-3	
Immunity Compliance	IEC 61000-4-2	±8kV air Discharge, ±6kV Contact Discharge
	ANSI/IEEE C62.41.2	2 kV combination wave
	ANSI/IEEE C62.41.1-2002	2.5kV Ring Wave, test at 30 Ω 7 Strikes/1 minute interval, Common and Differential mode, 56 total strikes
	IEC 61000-4-11	>95% dip, .5 period; 30% dip, 25 periods; 95% reduction, 250 periods
	IEC 61000-4-4	± 2kV Direct couple to Line input, 5kHz repetition rate, 15mS duration, 300mS period. 7 coupling paths, 1 minute per path (14 total combinations)

Note: Unless otherwise specified, all the above parameters are measured at ambient temperature of 25°C and rated voltage.

## Typical Application

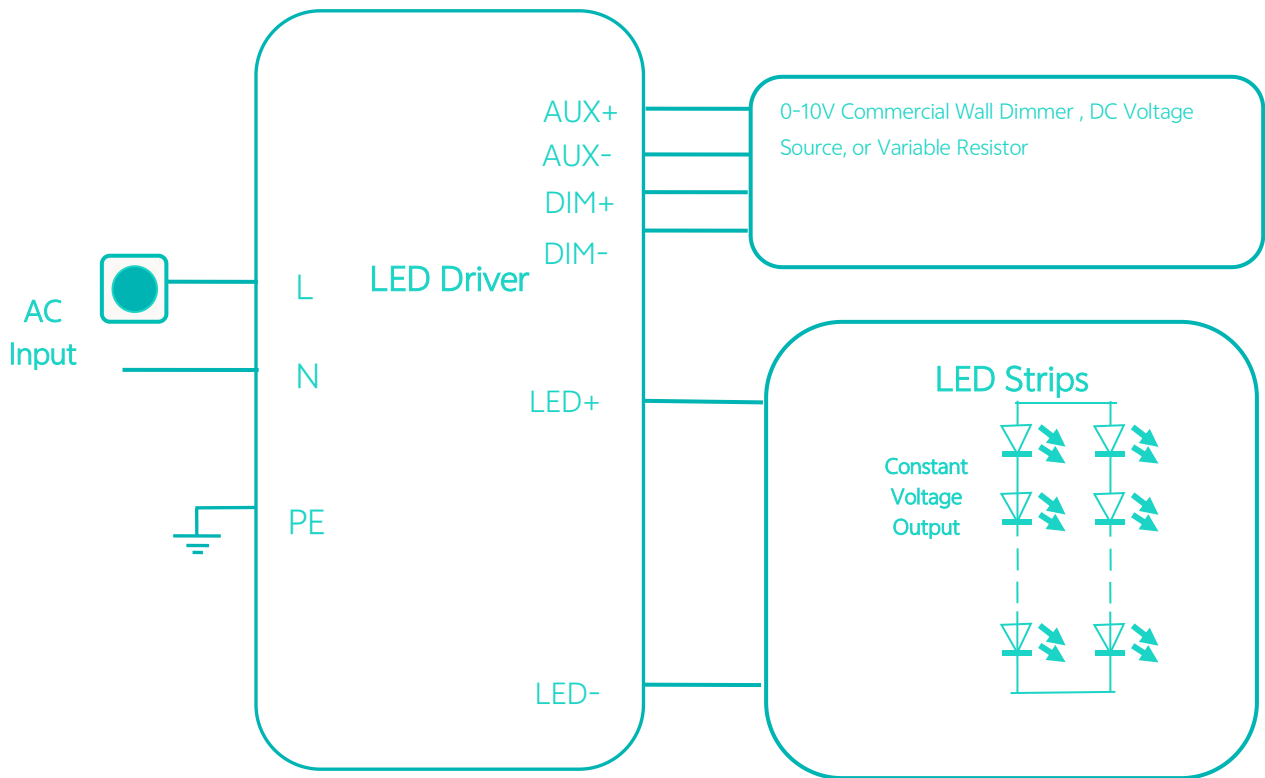

## Packaging

Driver quantity (pcs)	Layer	Weight (kg)	Outer dimensions of Carton L*W*H(mm)
25	5	15.0	335 X 265 X 230

## Mechanical Drawing:

