

LUMIGEAR

WIRELESS INTELLIGENT PANEL (SWA2-CSB & SWA4-CSB)



LUMIGEAR wireless 2-key and 4-key in-wall switches is integrated with Casambi modules, allowing you to control lighting devices remotely via Casambi app. The minimalist brushed metal texture create quiet and timeless elegance to the wall. The engravings on the pop-up press buttons can be delicately customized according to customer's demands, emitting even and bright LED backlight.



RoHS CASAMBI

KEY FEATURES

- CASAMBI ready;
- 15A magnetic latching relay, less energy consumption;
- Zero crossing detection improves relay life expectancy;
- Detachable & changeable cover plates, better suit various decoration styles;
- Cover plates available in aluminum golden/silver/gray; brushed brass and stainless steel;
- Faceplates are compatible with LUTRON dimmers, LEVITON switches, or standard outlets;

SPECIFICATIONS

Input: 120/277 VAC, 60 Hz, 15A Max;

Rated Power (Resistive): 1800 W @ 120VAC / 4000W @ 277VAC

Protocol: BLE Casambi

Sensor: Radar detector

Material: AL / PC

Operating temperature range: 0-40 °C

Humidity (%): 5-95% non-condensing

Product size : 119 x74.5 x36.9mm

Bottom shell depth: 30mm

Installation method: wall-embedded

Color: Golden/Silver/Gray/Brass

AVAILABLE PLATE COLOR



Aluminum Alloy - Powder Coated - Black



Aluminum Alloy - Powder Coated - White



Stainless Steel - Golden



Stainless Steel - Platinum



Brass - Brushed



Aluminum Alloy - Oxidized - Golden




Aluminum Alloy - Oxidized - Silver



Aluminum Alloy - Oxidized - Gray

WIRING DIAGRAMS

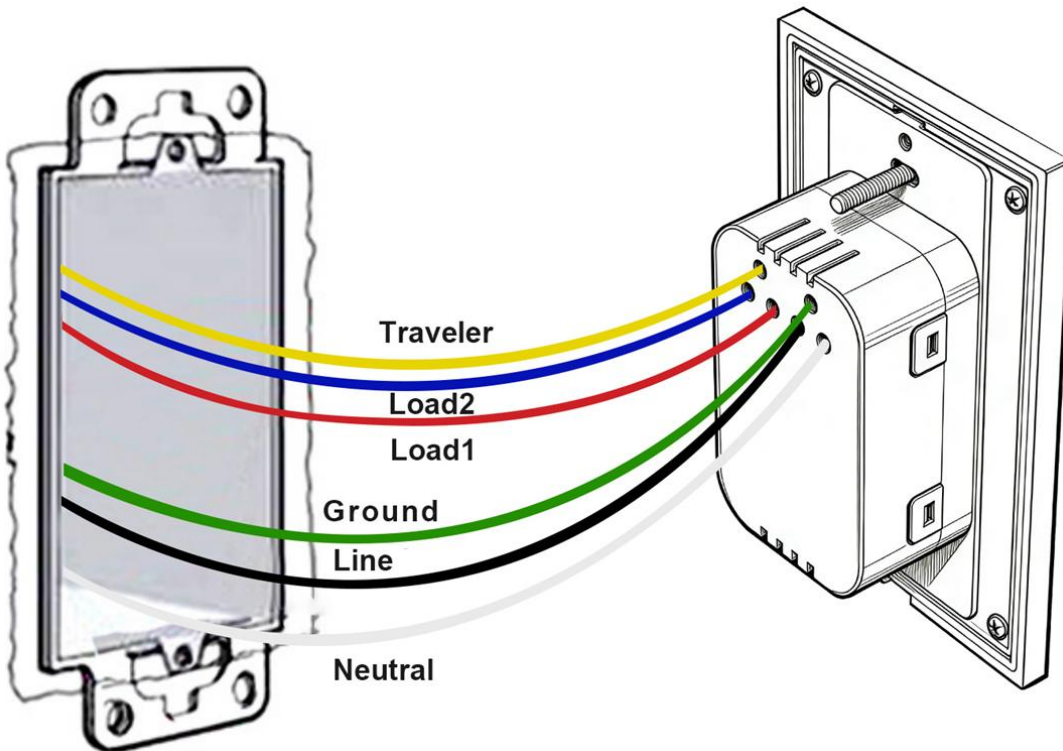

THREE- DIMENSIONAL DEPTH (mm)

