

Features & Benefits



- Universal ac input voltage(120-277VAC)
- Linear form factor, metal sheet case(white), side feed
- Isolated 0-10v dimming interface, dim down to true 1%
- Low standby power: <0.5W@120VAC
- Suitable for indoor use
- Flicker free, excellent camera compatibility, spec-grade smoothness
- USB programmable feature:
 - Output current, dim to off, min dimming level
 - OTP point of driver, luminous decay compensation,
 - End-of-life indicator, fade in time, over load protection point
- Dimming curve: Log/linear/square dim curves
- Class2, Class P
- Operating temperature: -30°C~+50°C
- Comply with IEEE1789, UL8750, Category A ring wave 2.5kV



Model List

| Model Name | Rated Input Voltage | Max Output Power(Total) | Output Current(Total) | Rated Output Voltage | Efficiency | Dimension |
|---------------------------|---------------------|-------------------------|-----------------------|----------------------|------------|-------------------------------------|
| AFS-A1-080S2000U-V-AUX-PC | 120-277VAC | 80W max. | 800-2000mA | 5-55VDC | 91% | 370*18.7*15.5mm 14.5×0.7×0.6 in. |

Optional Function

Aux power: 12V/50mA

Approvals



Model name code

| | | | | | | | | | | |
|--------|---|------|------|---|---|---|---|-----|---|----|
| AFS-A1 | = | 080S | 2000 | U | = | V | = | AUX | = | PC |
| ① | | ② | ③ | ④ | | ⑤ | | ⑥ | | ⑦ |

| | | |
|---|---------------------|--|
| ① | Series | AFS Series |
| ② | Output power | Maximum output power: 80W |
| ③ | Output current(max) | Maximum output power: 2000mA |
| ④ | Input voltage | 120-277VAC |
| ⑤ | Dimming Control | 0-10V |
| ⑥ | AUX | AUX: with Auxiliary source BLANK:without Auxiliary source |
| ⑦ | Programmable | USB-PC |


Specification:


| Parameters | Symbols | Test Conditions / Comment | Min | Typ | Max | Units | | | | | | | |
|--|--------------------|----------------------------------|-----|-------|------|----------|-----|-----|-----|-----|-----|-----|-----|
| INPUT | | | | | | | | | | | | | |
| Input Voltage | V_{IN} | | 108 | | 305 | V_{AC} | | | | | | | |
| Rated Input Voltage | $V_{INRATED}$ | | 120 | | 277 | V_{AC} | | | | | | | |
| Input Frequency | f_{line} | | 47 | 50/60 | 63 | Hz | | | | | | | |
| Input Current | I_{IN} | Full Load, $V_{IN} = 120V_{AC}$ | | | 0.88 | A | | | | | | | |
| Inrush Current | I_{INRUSH} | Cold Start, $V_{IN} = 277V_{AC}$ | | | 60 | A | | | | | | | |
| Leakage Current | $I_{Leakage}$ | $V_{IN} = 277V_{AC}$, 60Hz | | | 0.75 | mA | | | | | | | |
| Number of Drivers per MCB(Circuit Breaker) | MCB type | B10 | C10 | D10 | B13 | C13 | D13 | B16 | C16 | D16 | B20 | C20 | D20 |
| | 120V _{AC} | 7 | 8 | 10 | 9 | 11 | 13 | 12 | 14 | 16 | 15 | 17 | 20 |
| | 277V _{AC} | 4 | 7 | 14 | 5 | 9 | 18 | 6 | 11 | 22 | 8 | 14 | 28 |

| | Input Voltage | Inrush Current | t(us)10%-10% |
|--|---------------|----------------|--------------|
| | 120VAC | 24.32A | 201 |
| | 277VAC | 56.93A | 210 |
| | 347VAC | NA | NA |

General Characteristics


| | | | | | | |
|---------------------------|-----------------|--|------|----|-----|---|
| Power Factor | PF | 20-100% load, $V_{IN} = 120V_{AC}$ | 0.95 | | PF | |
| | | 60-100% load, $V_{IN} = 277V_{AC}$ | 0.9 | | | |
| Total Harmonic Distortion | THD | 20-100% load, $V_{IN} = 120V_{AC}$ | | 20 | % | |
| | | 60-100% load, $V_{IN} = 277V_{AC}$ | | 20 | % | |
| Efficiency | η | $V_{out}=55V$, $I_{out}=1450mA$, $V_{IN} = 120V_{AC}$, steady state | 87 | 89 | % | |
| | | $V_{out}=55V$, $I_{out}=1450mA$, $V_{IN} = 277V_{AC}$, steady state | 89 | 91 | % | |
| Turn On Delay Time | T_{on_delay} | Cold Start, 800-2000mA | | | 0.5 | S |

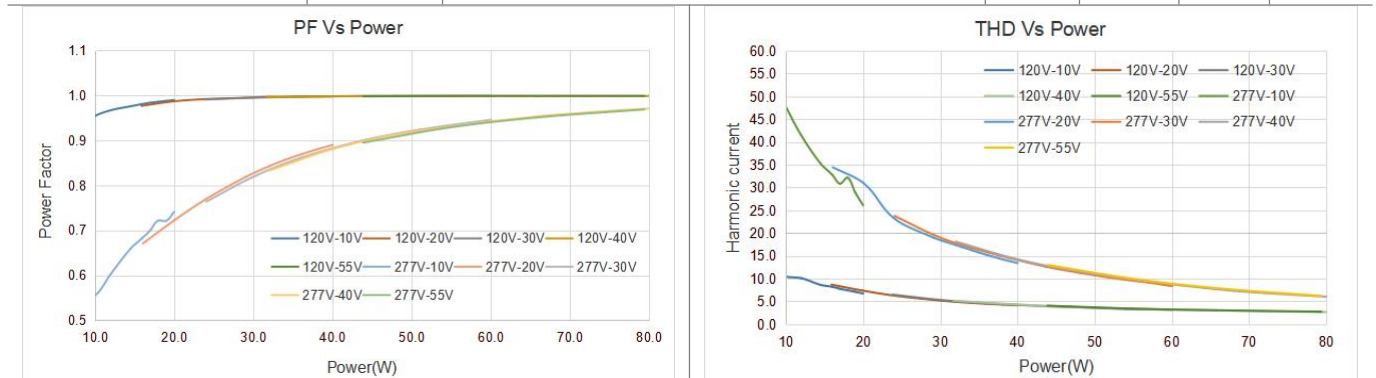

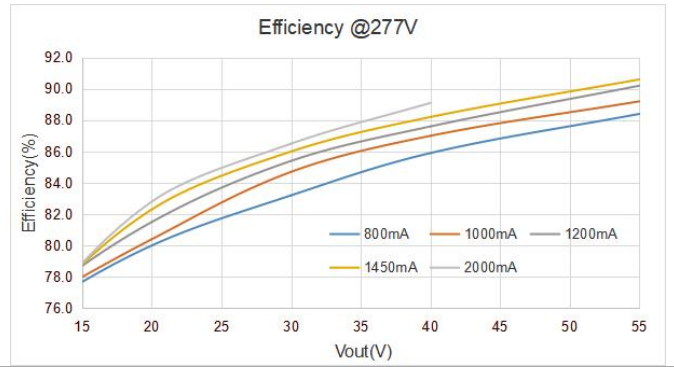

OUTPUT

| | | | | | | |
|-----------------------------|-------------------------|--|-----|--|------|----|
| Programmable Output Current | I _{OUT} | | 800 | | 2000 | mA |
| Output current tolerance | t | I _{OUT} =800-2000mA | | | 5 | % |
| Output Current Range | I _{OUT} | Amplitude Control. | 8.0 | | 2000 | mA |
| Output Voltage | V _{OUT} | | 5 | | 55 | V |
| Output Power | P _{OUT} | See "Operating window" | | | 80 | W |
| Line Regulation | V _{OUT-LINE} | | | | 3 | % |
| Load Regulation | I _{OUT-LOAD} | V _{OUT} from MIN. to MAX. | | | 5 | % |
| Ripple Current | I _{OUT-RIPPLE} | Full Load, (I _{omax} -I _{omin})/(I _{omax} +I _{omin}) | | | 10 | % |
| Output Current Overshoot | I _{OVERSHOOT} | Turning Power ON | | | 10 | % |

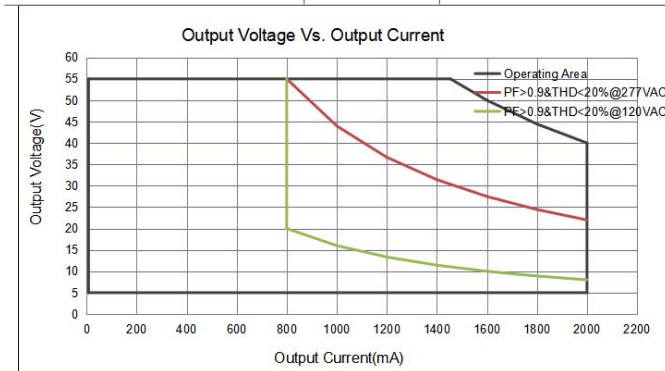

Programming

User can program the driver via terminal block. Please contact to LUMIGEAR for details.




| NO. | Item | Default Setting | | |
|--------------------------|----------------------------------|---|-----|-----|
| 1 | Output current(1mA Step) | See"Model list" for each model | | |
| 2 | Dim to off | Enable | | |
| 3 | Min Dimming Level | 1% | | |
| 4 | OTP point of driver | See "Protection" section | | |
| 5 | Luminous decay compensation | Disable | | |
| 6 | End-of-life indicator | Disable | | |
| 7 | Fade in time | 50mS | | |
| 8 | Over load protection point | See "Protection" section | | |
| 9 | Dimming curve: Log/linear/square | See "0-10V or Resistor Dimming" section | | |
| Programming Interface | PGT-USB-TPAC-A |  | | |
| Programming Cables | PGT-USB-M4P2 |  | | |
| Interface-Terminal block | Programming software | "LUMIGEAR Programming Tool" | | |
| | Programming tool | "Lumigear tool box" | | |
| | Operating voltage | | 3.3 | 3.6 |

0~10V or Resistor Dimming

The 0~10V or resistor dimming can be used to dim the output Current via a standard commercial wall dimmer (0~10V_{DC}) or an external control voltage source (0~10V_{DC}) or external resistor.

| Dimming Curve | Log/linear/square dim curves, Default Linear. please see "Dimming curve". | | | | | |
|---------------------------------------|---|----------------------------------|---|-----|-----|-----------------|
| Absolute Maximum Voltage on 0~10V Pin | V_{DIM} | | 0 | | 300 | V |
| Source Current on 0~10V Dimming Pin | I_{DIM} | | | 200 | | uA |
| Light On | V_{DIM-on} | Programmable | | 0.9 | | V |
| Light Off | $V_{DIM-off}$ | Programmable | | 0.7 | | V |
| Clamp Voltage | $V_{DIM-Clamp}$ | Programmable | | 1 | | V |
| Dimming Voltage for Full Bright | $V_{DIM-MAX}$ | Programmable | | 8 | | V |
| Leakage Voltage | $V_{Leak,rms}$ | Voltage between DIM- and Ground | | | 20 | V _{AC} |
| Standby power | $P_{STANDBY}$ | Light Off, V _{IN} =120V | | | 0.5 | W |

Figure 1: Intensity Dimming Profile Characteristics

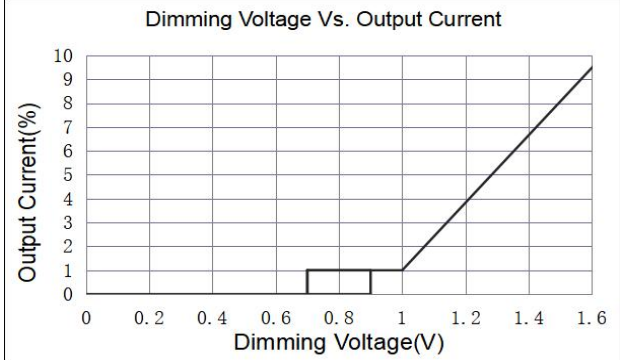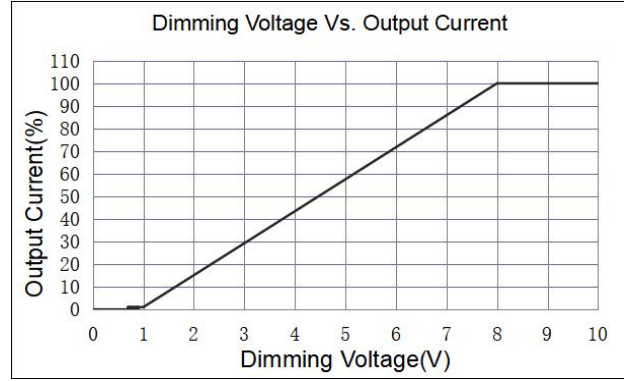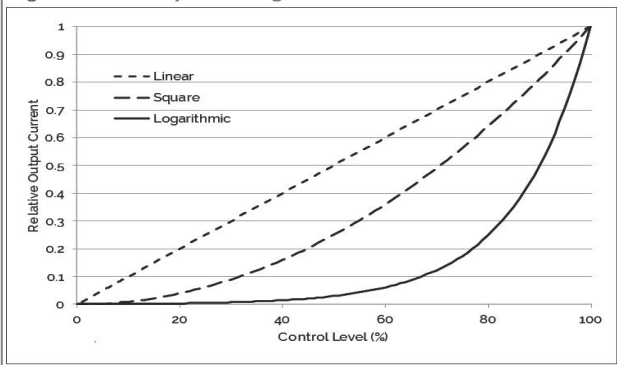

Auxiliary source (Optional)

| | | | | | | |
|----------------------|--------------------|------------|----|----|-----|-----|
| Max.power | P_{AUX} | | | | 0.6 | W |
| Output Voltage | $V_{AUX_DEFAULT}$ | | 11 | 12 | 13 | Vdc |
| Over load Protection | P_{OLP_AUX} | CC/CV mode | | | 1 | W |

Protection

| | | | | | | |
|--------------------------|--|---|-----|----|-----|----|
| Over Voltage Protection | V_{OVP} | Recover automatically after fault conditions is removed. | | | 60 | V |
| Over load protection | P_{OLP} | Programmable. The output current will decrease when output power reach P_{OLP} | 32 | | 80 | W |
| OLP tolerance | t_{OLP} | | 100 | | 110 | % |
| Over Temp. Protection | T_{OTP} | Current foldback at hotspot greater than T_{OTP} | | 90 | | °C |
| Short Circuit Protection | The unit will recover automatically after fault conditions is removed. | | | | | |


Environment

| | | | | | | |
|-------------------------------|---------------|---------------------------|-----|---|-----|----|
| Storage Temperature | $T_{Storage}$ | Humidity: 5% RH to 95% RH | -40 | - | +85 | °C |
| Ambient Operating Temperature | T_a | | -30 | - | +55 | °C |
| Max. Case Temperature | T_c | Hot spot on case | | | 90 | °C |

| | | | | | | |
|-----------------------------|--------------------------|-------------------------------|----|--|----|-----|
| Operating Relative Humidity | H _a | Non-Condensing | 10 | | 90 | % |
| Acoustic Noise | | Measured from 1 m w/o dimmer. | | | 24 | dBA |
| Cooling | Convection Cooling | | | | | |
| IP Rating | Dry and damp UL approved | | | | | |

Others

| | | | | | | |
|------------|---|---|-----|-----|--|------|
| Life Time | T _{Life} | Full Load, 85°C case temperature, V _{IN} = 120/277V _{AC} | 50 | | | kHrs |
| MTBF | T _{MTBF} | Full Load, 25°C ambient temperature V _{IN} = 120/277V _{AC} | 200 | | | kHrs |
| Net Weight | W _{NET} | | | 215 | | g |
| Warranty | 5 Years Warranty at T _c ≤ 85°C | | | | | |
| Flicker | IEEE 1789, Title 24 | | | | | |

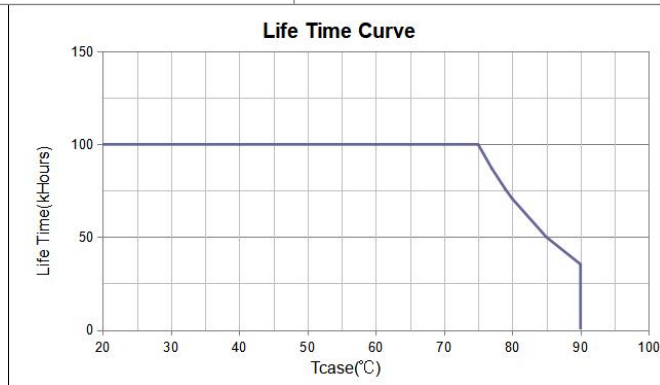

Safety Compliance


| | |
|--------|----------------------------------|
| CUL/UL | UL8750, CAN/CSA-C22.2 No. 250.13 |
|--------|----------------------------------|

Electromagnetic Compliance

| EMC Requirements | Standard | Conditions |
|----------------------------------|-----------------------|---|
| EMI Emissions | FCC Title 47 Part 15B | Class B at 120V _{AC} , Class A at 277V _{AC} |
| Voltage Fluctuations and Flicker | IEC61000-3-3 | |
| Immunity Compliance | IEC 61000-4-2 | ±8kV air Discharge, ±6kV Contact Discharge |
| | ANSI C62.41-2002 | ± 2kV Common and Differential Mode, test at 2 Ω, 5 strikes/1minute interval (40 total strikes) |
| | ANSI C62.41.1-2002 | 2.5kV Ring Wave, test at 30Ω 7 Strikes/1 minute interval, Common and Differential mode, 56 total strikes |
| | IEC 61000-4-11 | >95% dip, .5 period; 30% dip, 25 periods; 95% reduction, 250 periods |
| | IEC 61000-4-4 | ± 2kV Direct couple to Line input, 5kHz repetition rate, 15mS duration, 300mS period. 7 coupling paths, 1 minute per path (14 total combinations) |

Note: Unless otherwise specified, all the above parameters are measured at ambient temperature of 25°C and rated voltage.

Typical Application

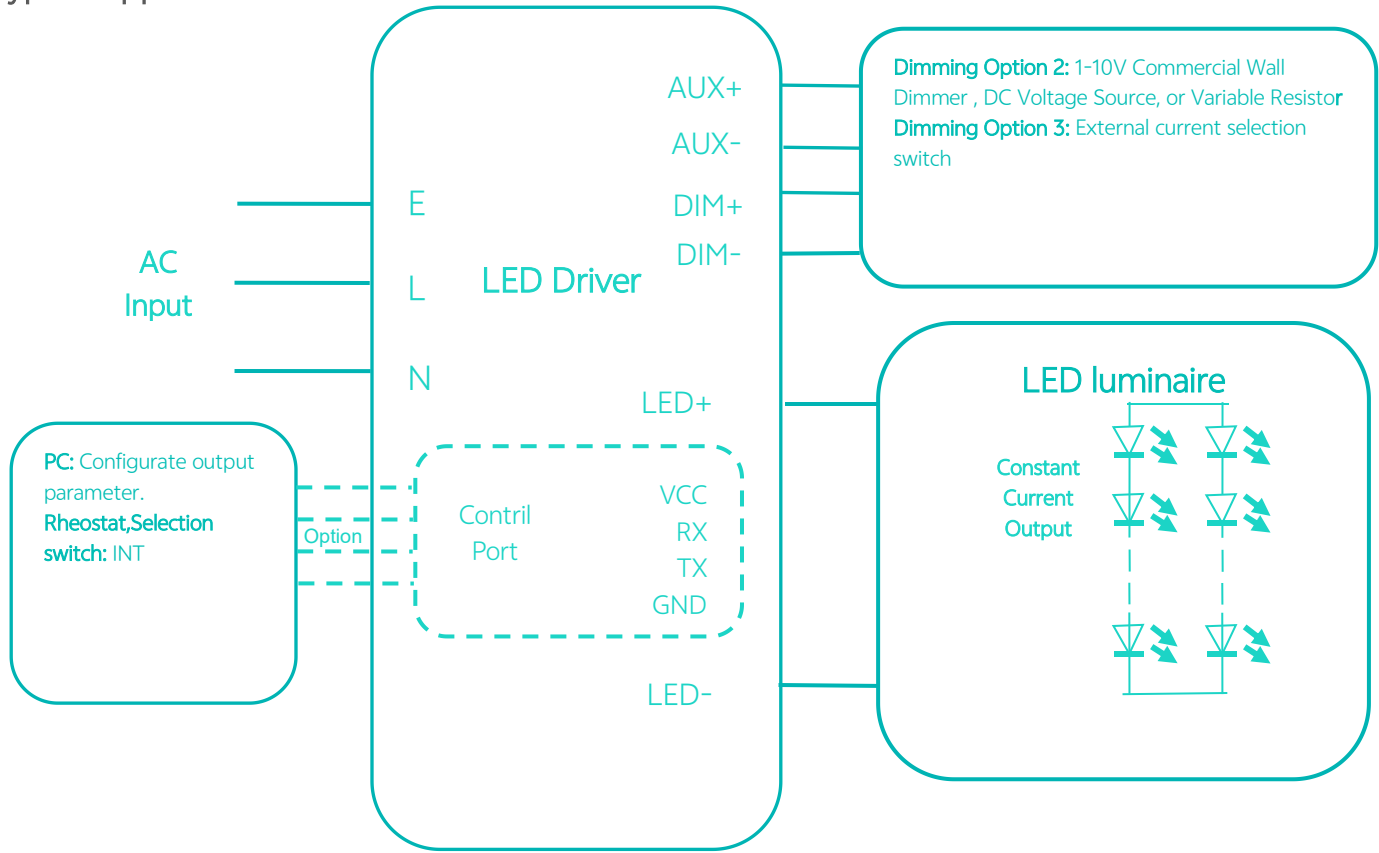

Packaging

| Driver quantity (pcs) | Layer | Weight (kg) | Outer dimensions of Carton L*W*H(mm) |
|-----------------------|-------|-------------|---|
| TBD | TBD | TBD | 330 X 300 X 230 |

Mechanical Drawing:

