


Features & Benefits

- Universal AC input voltage(120-277VAC)
- Linear form factor, metal sheet case(white), side feed
- Dimmable built-in constant current independent dual outputs LED driver, dim down to true 1%.
- Standard-compliant (DiiA) digital interface including:
 - Integrated DALI bus power supply (IEC62386-250)
 - Memory Bank 1 extension, Energy Monitoring and Diagnostics (IEC62386, Parts 251, 252, 253)
 - DALI-2 Device Type 6: IEC62386-101{ed2.0}-2014, IEC62386-102{ed2.0}-2014, IEC62386-207{ed2.0}-2018
 - DALI-2 Device Type 8: IEC62386-209{ed1.0}-201
- Max. output power 85W shared between the two channels
- Low standby power: <1.2W@120VAC
- Flicker free, excellent camera compatibility, spec-grade smoothness
- UL Class2, Class P
- Comply with IEEE1789, UL8750

USB Programmable:

- ◆ Output current
- ◆ Colour temperature range
- ◆ OTP point, LED thermal protection(NTC)
- ◆ Over load protection point
- ◆ Dimming curve: log/linear
- ◆ Selectable for dimming mode: solo dimming,warm dimming,tunable white,dual dimming,DT8 dimming.
- ◆ LED Lumen Information



Model List

Model Name	Rated Input Voltage	Max Output Power(Total)	Output Current(Total)	Rated Output Voltage	Efficiency	Dimension
PDL-D1-085D1050U-DALI-PC-2	120-277VAC	85W max.	2*(850-2300)mA (1mA step)	2*(10-55)VDC	90%	380*30*25.4 mm 14.9*1.2*1 in.

Approvals



Model name code

<u>PDL-D1</u>	-	<u>085D</u>	<u>2300</u>	<u>U</u>	-	<u>DALI</u>	-	<u>PC</u>	-	<u>2</u>
①		②	③	④		⑤		⑥		⑦

① Series PDL Series (DALI DT8+D4i)

② Output power Maximum output power: 85W

③	Output Current(max)	Output current:2300mA
④	Input voltage	120-277VAC
⑤	Dimming Control	DALI-2
⑥	Programmable	USB-PC
⑦	Surge protection level	2-10 2=2kV 10=10kV

Specification:

Parameters	Symbols	Test Conditions / Comment	Min	Typ	Max	Units
------------	---------	---------------------------	-----	-----	-----	-------

INPUT


Input Voltage	V_{IN}		108		305	V_{AC}
Rated Input Voltage	$V_{IN\ RATED}$		120		277	V_{AC}
Input Frequency	f_{line}		47	50/60	63	Hz
Input Current	I_{IN}	Full Load, $V_{IN} = 120V_{AC}$			0.94	A
Inrush Current	I_{INRUSH}	Cold Start, $V_{IN} = 277V_{AC}$			75	A
Leakage Current	$I_{Leakage}$	$V_{IN} = 277V_{AC}$ 60Hz			0.75	mA
Number of Drivers per MCB(Circuit Breaker)	MCB type	B10 C10 D10 B13 C13 D13 B16 C16 D16 B20 C20 D20				
	120V _{AC}	13 15 17 17 20 22 21 24 28 26 30 35				
	277V _{AC}	9 15 31 39 20 40 15 25 50 18 31 62				




Input Voltage	Inrush Current	t(us)10%-10%
120VAC	22.2A	186
277VAC	51.2A	180
347VAC	NA	NA

General Characteristics


Power Factor	PF	20-100% load, $V_{IN} = 120V_{AC}$	0.9			PF
		40-100% load, $V_{IN} = 277V_{AC}$	0.9			
Total Harmonic Distortion	THD	20-100% load, $V_{IN} = 120V_{AC}$			20	%
		40-100% load, $V_{IN} = 277V_{AC}$			20	%
Efficiency	η	Full load, $V_{IN} = 120V_{AC}$, $I_{OUT} = 1600mA$, $V_{OUT} = 55V$, Steady state	86	88		%
		Full load, $V_{IN} = 277V_{AC}$, $I_{OUT} = 1600mA$, $V_{OUT} = 55V$, Steady state	88	90		%
Turn On Delay Time	T_{on_delay}	Cold Start, 850-2300mA			0.8	S

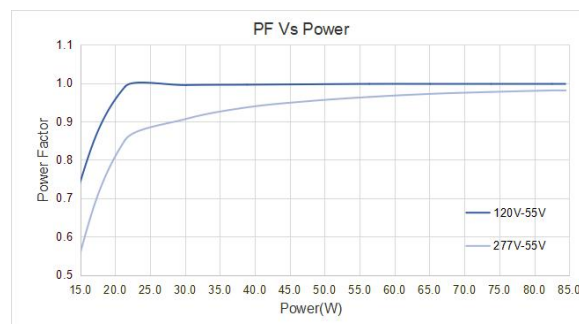

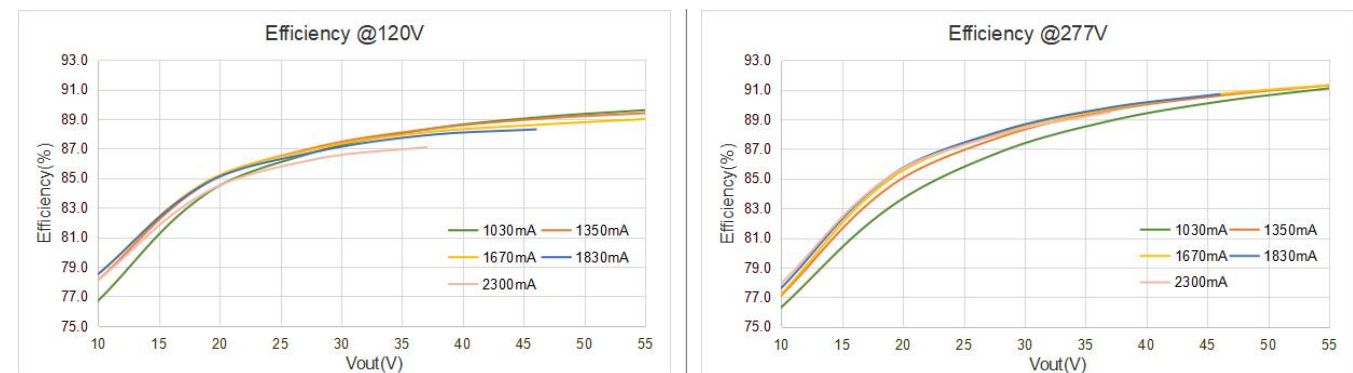

OUTPUT

Programmable Current	Output	I_{OUT}	One Channel	850		2300	mA
Number of Output	N	Independent			2		
Output current tolerance	t	$I_{OUT}=850-2300\text{mA}$				5	%
Output Current Range	I_{OUT}	Amplitude Control.	8.5		2300		mA
Output Voltage	V_{OUT}		10		55		V
Output Power	P_{OUT}	See "Operating window"			85		W
Line Regulation	$V_{OUT-LINE}$				1		%
Load Regulation	$I_{OUT-LOAD}$	V_{OUT} from MIN. to MAX.			5		%
Ripple Current	$I_{OUT-RIPPLE}$	Full Load, $(I_{Omax}-I_{Omin})/(I_{Omax}+I_{Omin})$			10		%
Output Current Overshoot	$I_{OVERSHOOT}$	Turning Power ON			10		%

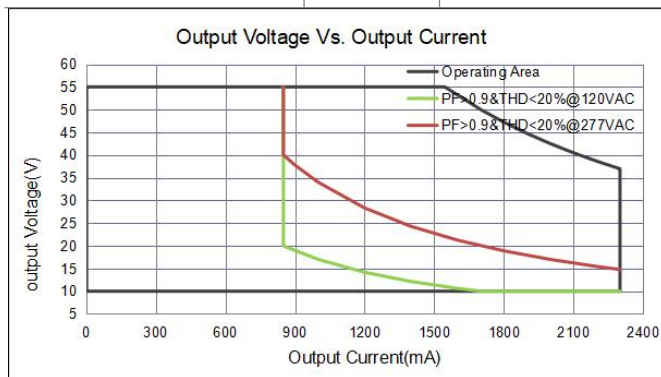


Programming (Optional)

The driver can be programmed through USB.

- Output current
- Colour temperature range
- OTP point, LED thermal protection(NTC)
- Over load protection point
- Dimming Curve: Logarithmic /linear
- Selectable for dimming mode: Solo Dimming, Warm Dimming, Tunable White, Dual Dimming, DT8 Dimming.


USB port	Programming software	"LUMIGEAR Programming Tool"
	Programming tool	"Lumigear tool box"

	Operating voltage			3.3	3.6	V
	+5V Aux power				10	mA
Programming Interface	PGT-USB-TPAC-A					
Programming Cables	PGT-USB-P254					

DALI (L Style)

It complies with the IEC62386-101:2018 Ed2.0, IEC62386-102:2018 Ed2.0, and IEC62386-207 Ed1.0 standard protocols, and can control the driver's on, off, dimming, scene, group, addressing and other functions through standard DALI instructions.

It can be controlled by a DALI Master to perform functions such as turning on/off, dimming, adjusting color temperature, scene selection, grouping, address settings, and more.

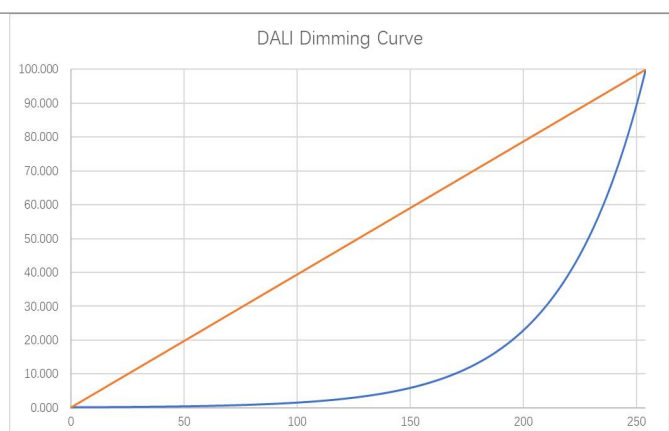

Integrated DALI bus power supply

This function complies to DiiA specification DALI Part 250 - Integrated bus power supply.

The output power of the integrated DALI Bus Power Supply has an output current of 50 mA (max. 62 mA).

It is activated by factory default. Sensors and also external drivers could be directly connected to this power supply. The DALI power supply could be deactivated via software.



Power supplies can be combined up to 250 mA max in total.

This maximum must not exceed. The polarity has to be considered.

If the DALI power supply is activated, the driver must not be integrated into an existing, already with 250 mA powered DALI network.


LED Thermal Protection (NTC) Characteristic

The LED thermal protection feature of the driver helps reduce the temperature of the LED module by reducing dual output current together in case of abnormal temperature conditions.

In the end application, care must be taken to place the NTC thermistor close to the hottest spot on the LED module.

If LED thermal protection is not required the NTC port on the LED power supply connector can be left open.

Graphs for reference. The derating limits can be programmed using the Light Touch.

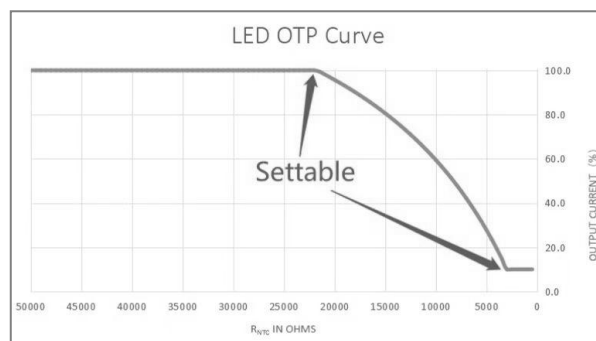

Protection


Over Voltage Protection	V_{OVP}	Recover automatically after fault conditions is removed.			60	V
Over load Protection	P_{OLP}	Programmable. The output current will decrease when output power reach P_{OLP}	34		85	W
OLP tolerance	t_{OLP}		100		110	%
Over Temp. Protection	T_{OTP}	Programmable. Current foldback at hotspot greater than T_{OTP}		90		°C
Short Circuit Protection	Recover automatically after fault conditions is removed.					

Environment

Storage Temperature	$T_{Storage}$	Humidity: 5% RH to 95% RH	-40	-	+85	°C
Ambient Operating Temperature	T_a		-30	-	+55	°C
Max. Case Temperature	T_c	Hot spot on case			90	°C
Operating Relative Humidity	H_a	Non-Condensing	10		90	%
Acoustic Noise		Measured from 1 m.			24	dBA
Cooling	Convection Cooling					
IP Rating	Dry and damp UL approved					

Others

Life Time	T_{Life}	Full Load, 80°C case temperature, $V_{IN} = 120/277V_{AC}$	50			kHrs
MTBF	T_{MTBF}	Full Load, 25°C ambient temperature $V_{IN} = 120/277V_{AC}$	200			kHrs
Net Weight	W_{NET}			395		g
Warranty	5 Years Warranty at $T_c \leq 80^\circ C$					
Flicker	IEEE 1789, Title 24					

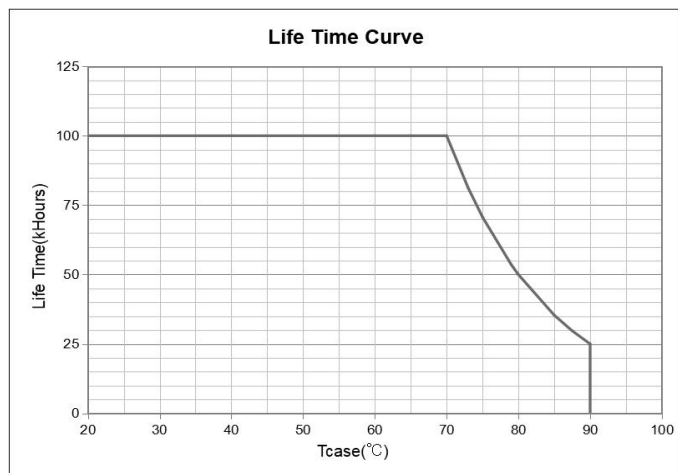

Safety Compliance


CUL/UL	UL8750, CAN/CSA-C22.2 No. 250.13
--------	----------------------------------

Electromagnetic Compliance

EMC Requirements	Standard	Conditions
EMI Emissions	FCC Title 47 Part 15B	Class B at 120V _{AC} , Class A at 277V _{AC}
Voltage Fluctuations and Flicker	IEC61000-3-3	
Immunity Compliance	IEC 61000-4-2	±8kV air Discharge, ±6kV Contact Discharge
	ANSI C62.41	± 2kV Common and Differential Mode, test at 2 Ω, 5 strikes/1minute interval (40 total strikes)
	ANSI C62.41.1	2.5kV Ring Wave, test at 30 Ω 7 Strikes/1 minute interval, Common and Differential mode, 56 total strikes
	IEC 61000-4-11	>95% dip, .5 period; 30% dip, 25 periods; 95% reduction, 250 periods
	IEC 61000-4-4	± 2kV Direct couple to Line input, 5kHz repetition rate, 15mS duration, 300mS period. 7 coupling paths, 1 minute per path (14 total combinations)

Note: Unless otherwise specified, all the above parameters are measured at ambient temperature of 25°C and rated voltage.

Typical Application:

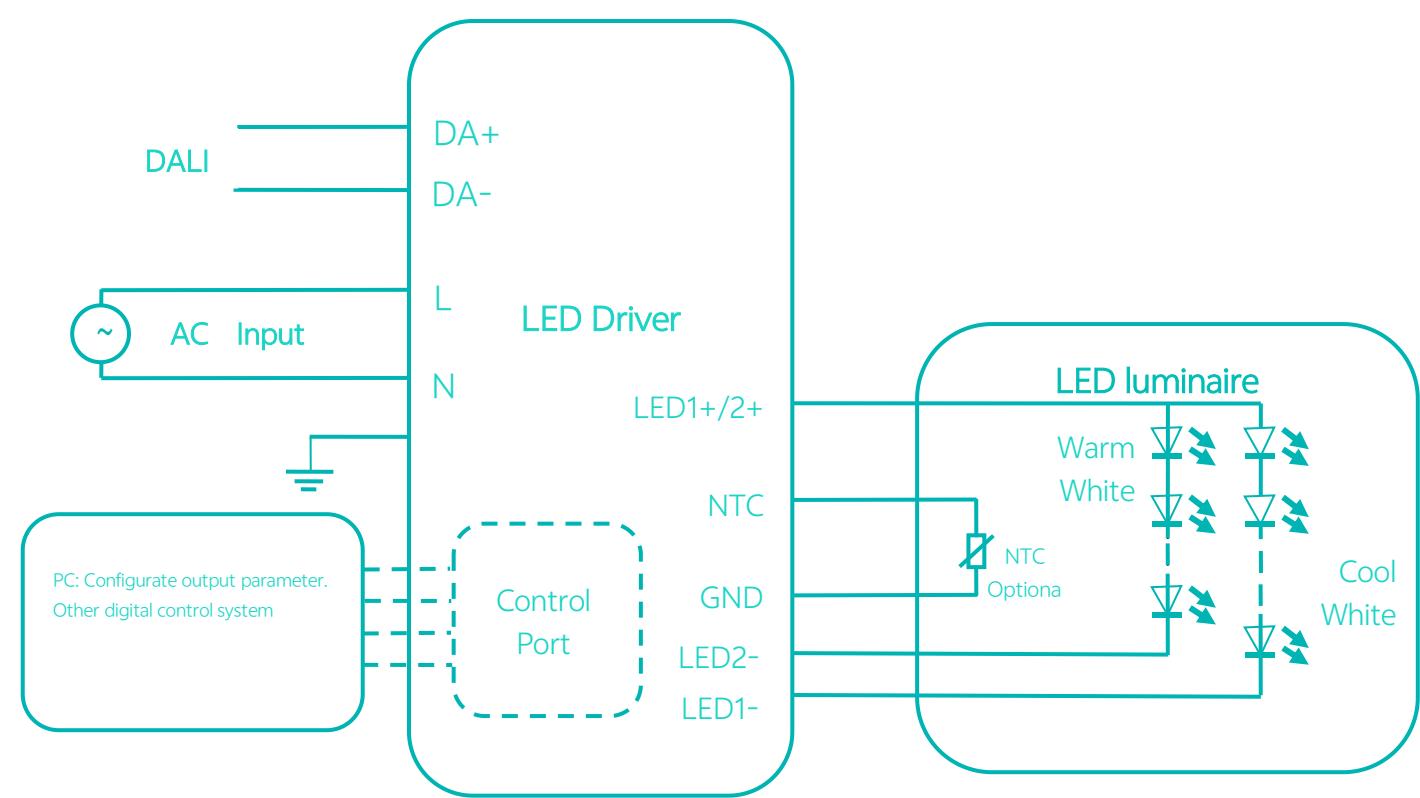

Packaging

Driver quantity (pcs)	Layer	Weight (kg)	Outer dimensions of Carton L*W*H(mm)
35	5	14.5	400 X 275 X 180

Mechanical Drawing:

